



HMRV

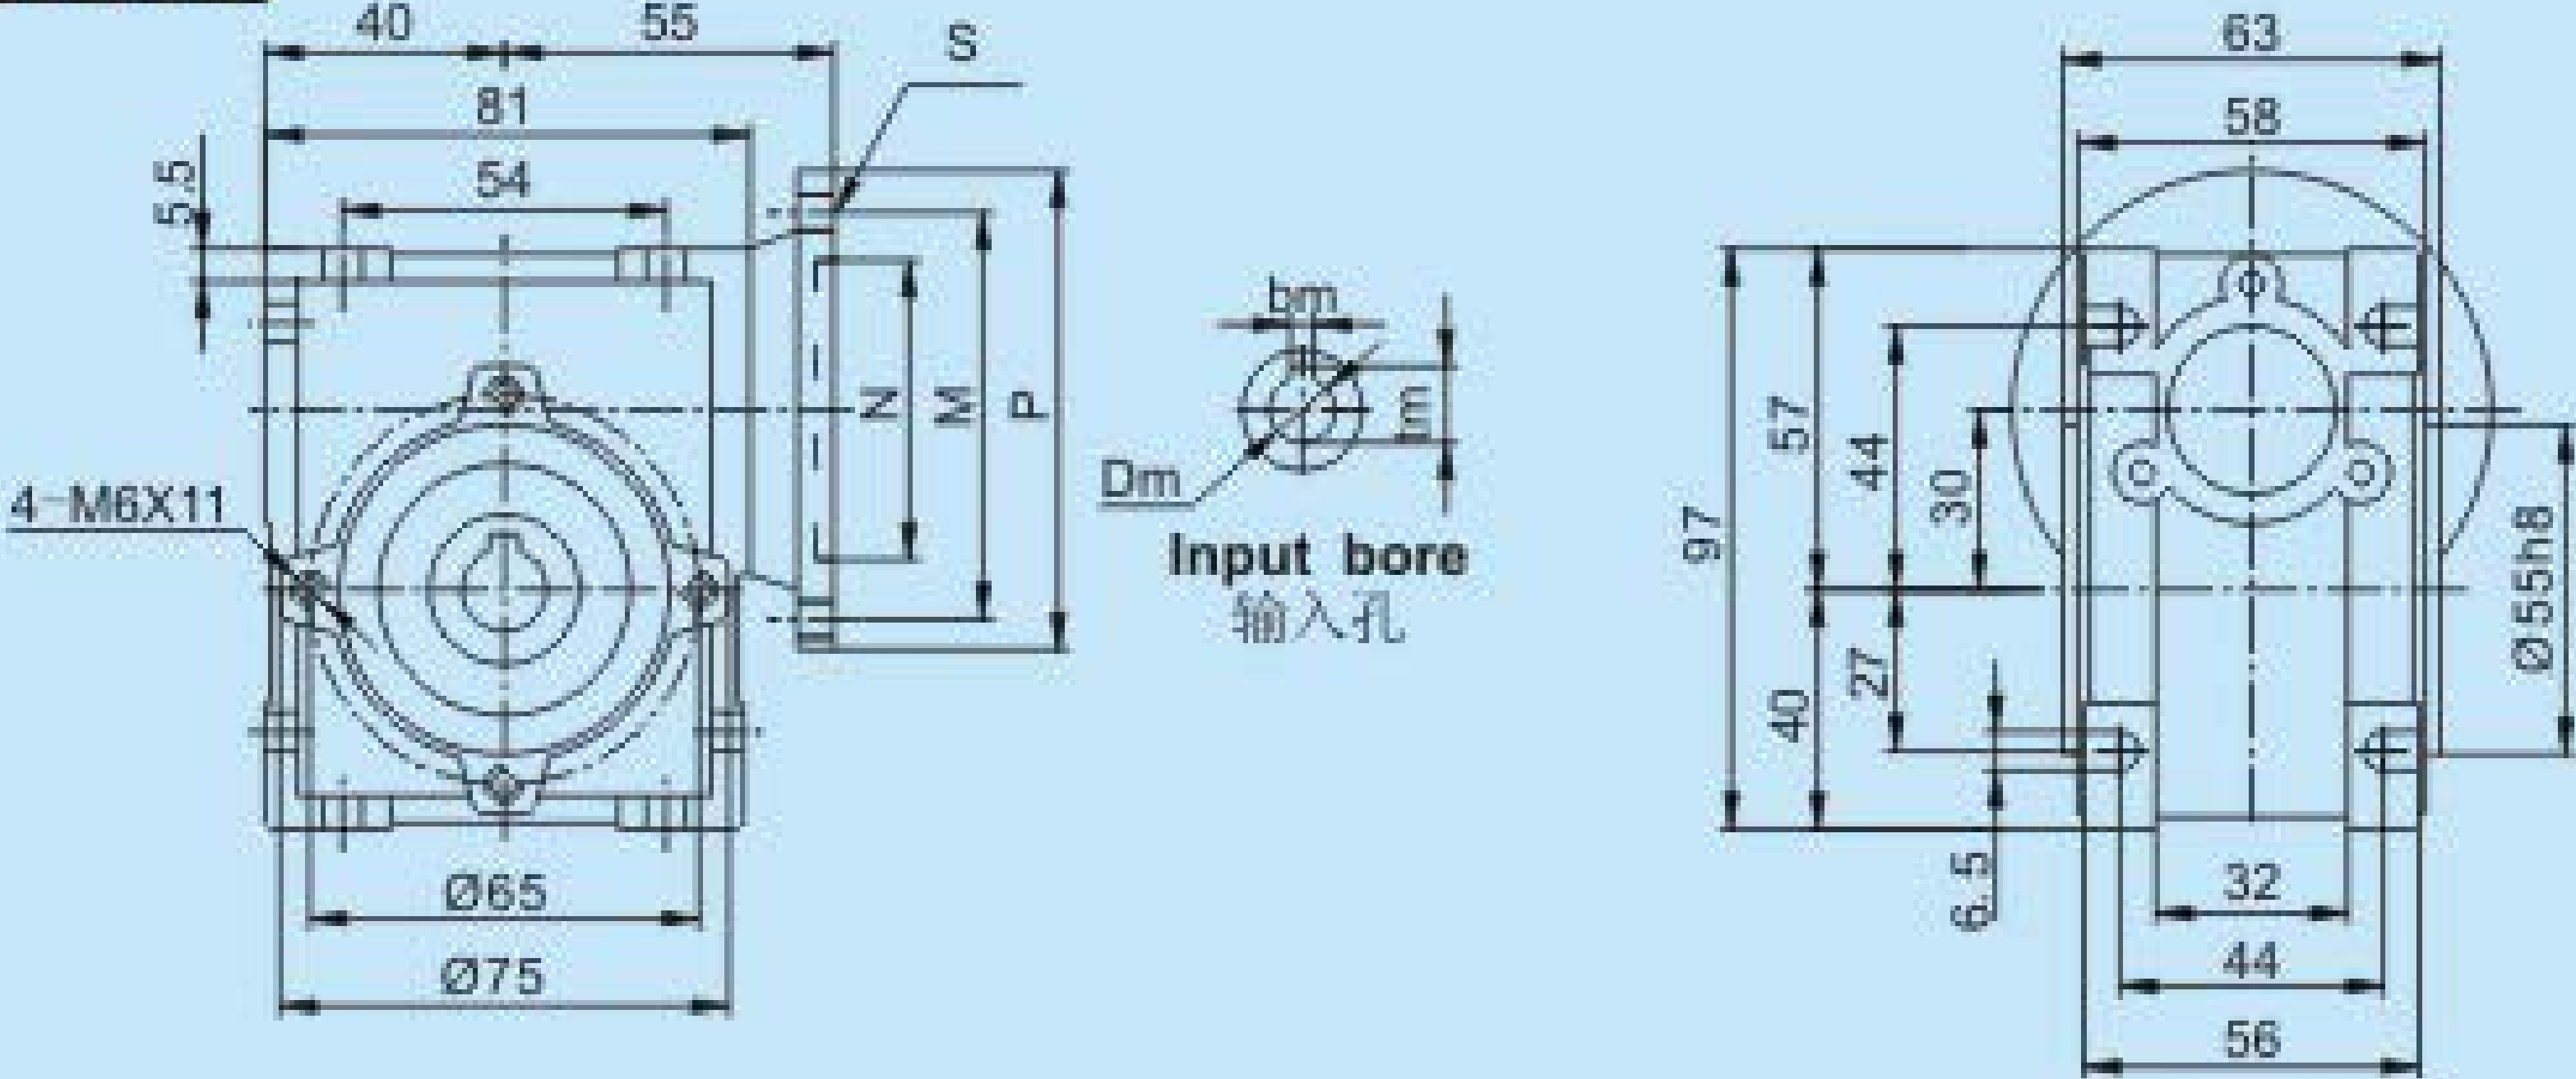


HMRV. VS

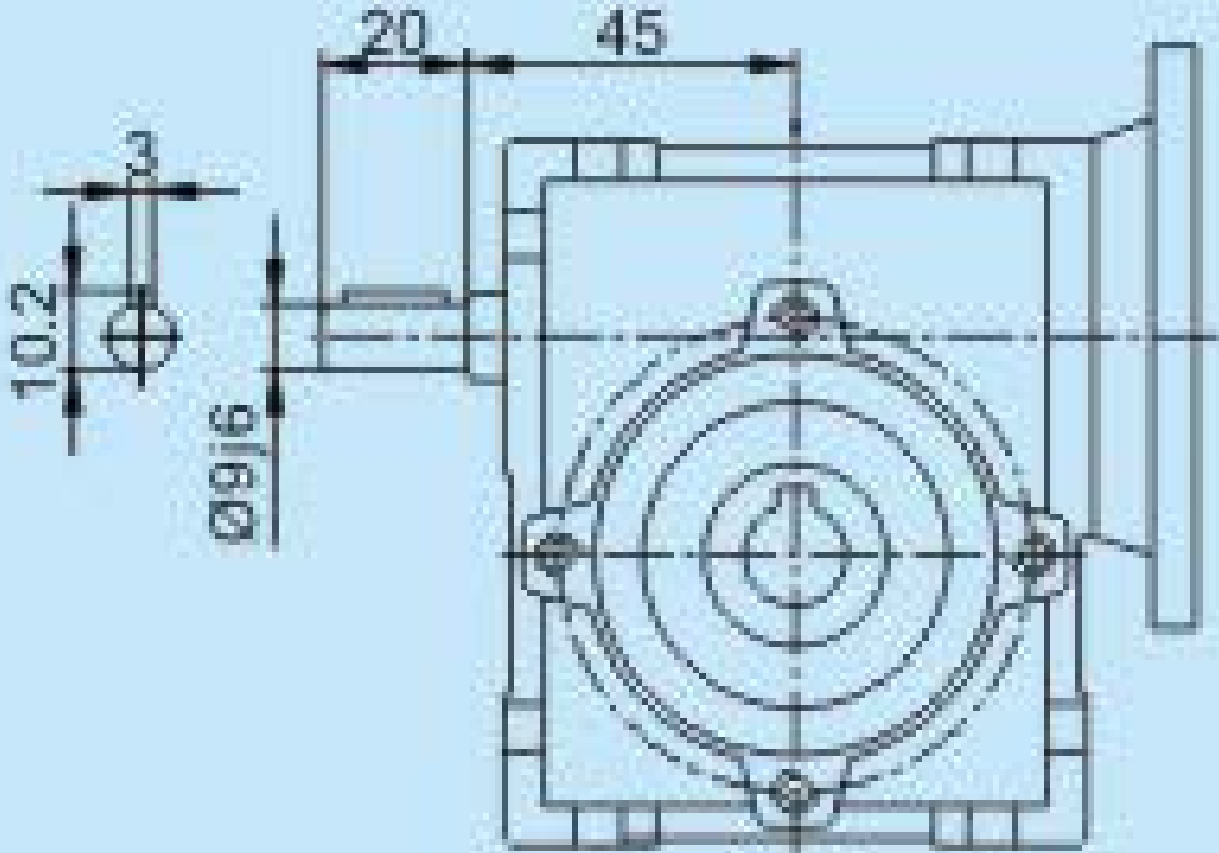


PAM-IEC 适用电机	N (H8)	M	P	bm	tm	S	Dm (H7)											
							5	7.5	10	15	20	25	30	40	50	60	80	100
63B5	Ø95	Ø115	Ø140	4	12.8	Ø9	11	11	11	11	11	11	11	11	—	—	—	23
63B14	Ø60	Ø75	Ø90	4	12.8	Ø6												
56B5	Ø80	Ø100	Ø120	3	10.4	Ø7	9	9	9	9	9	9	9	9	9	9	—	20
56B14	Ø50	Ø65	Ø80	3	10.4	Ø6												

Weight:1.3kg
重量: 1.3kg



HMRV

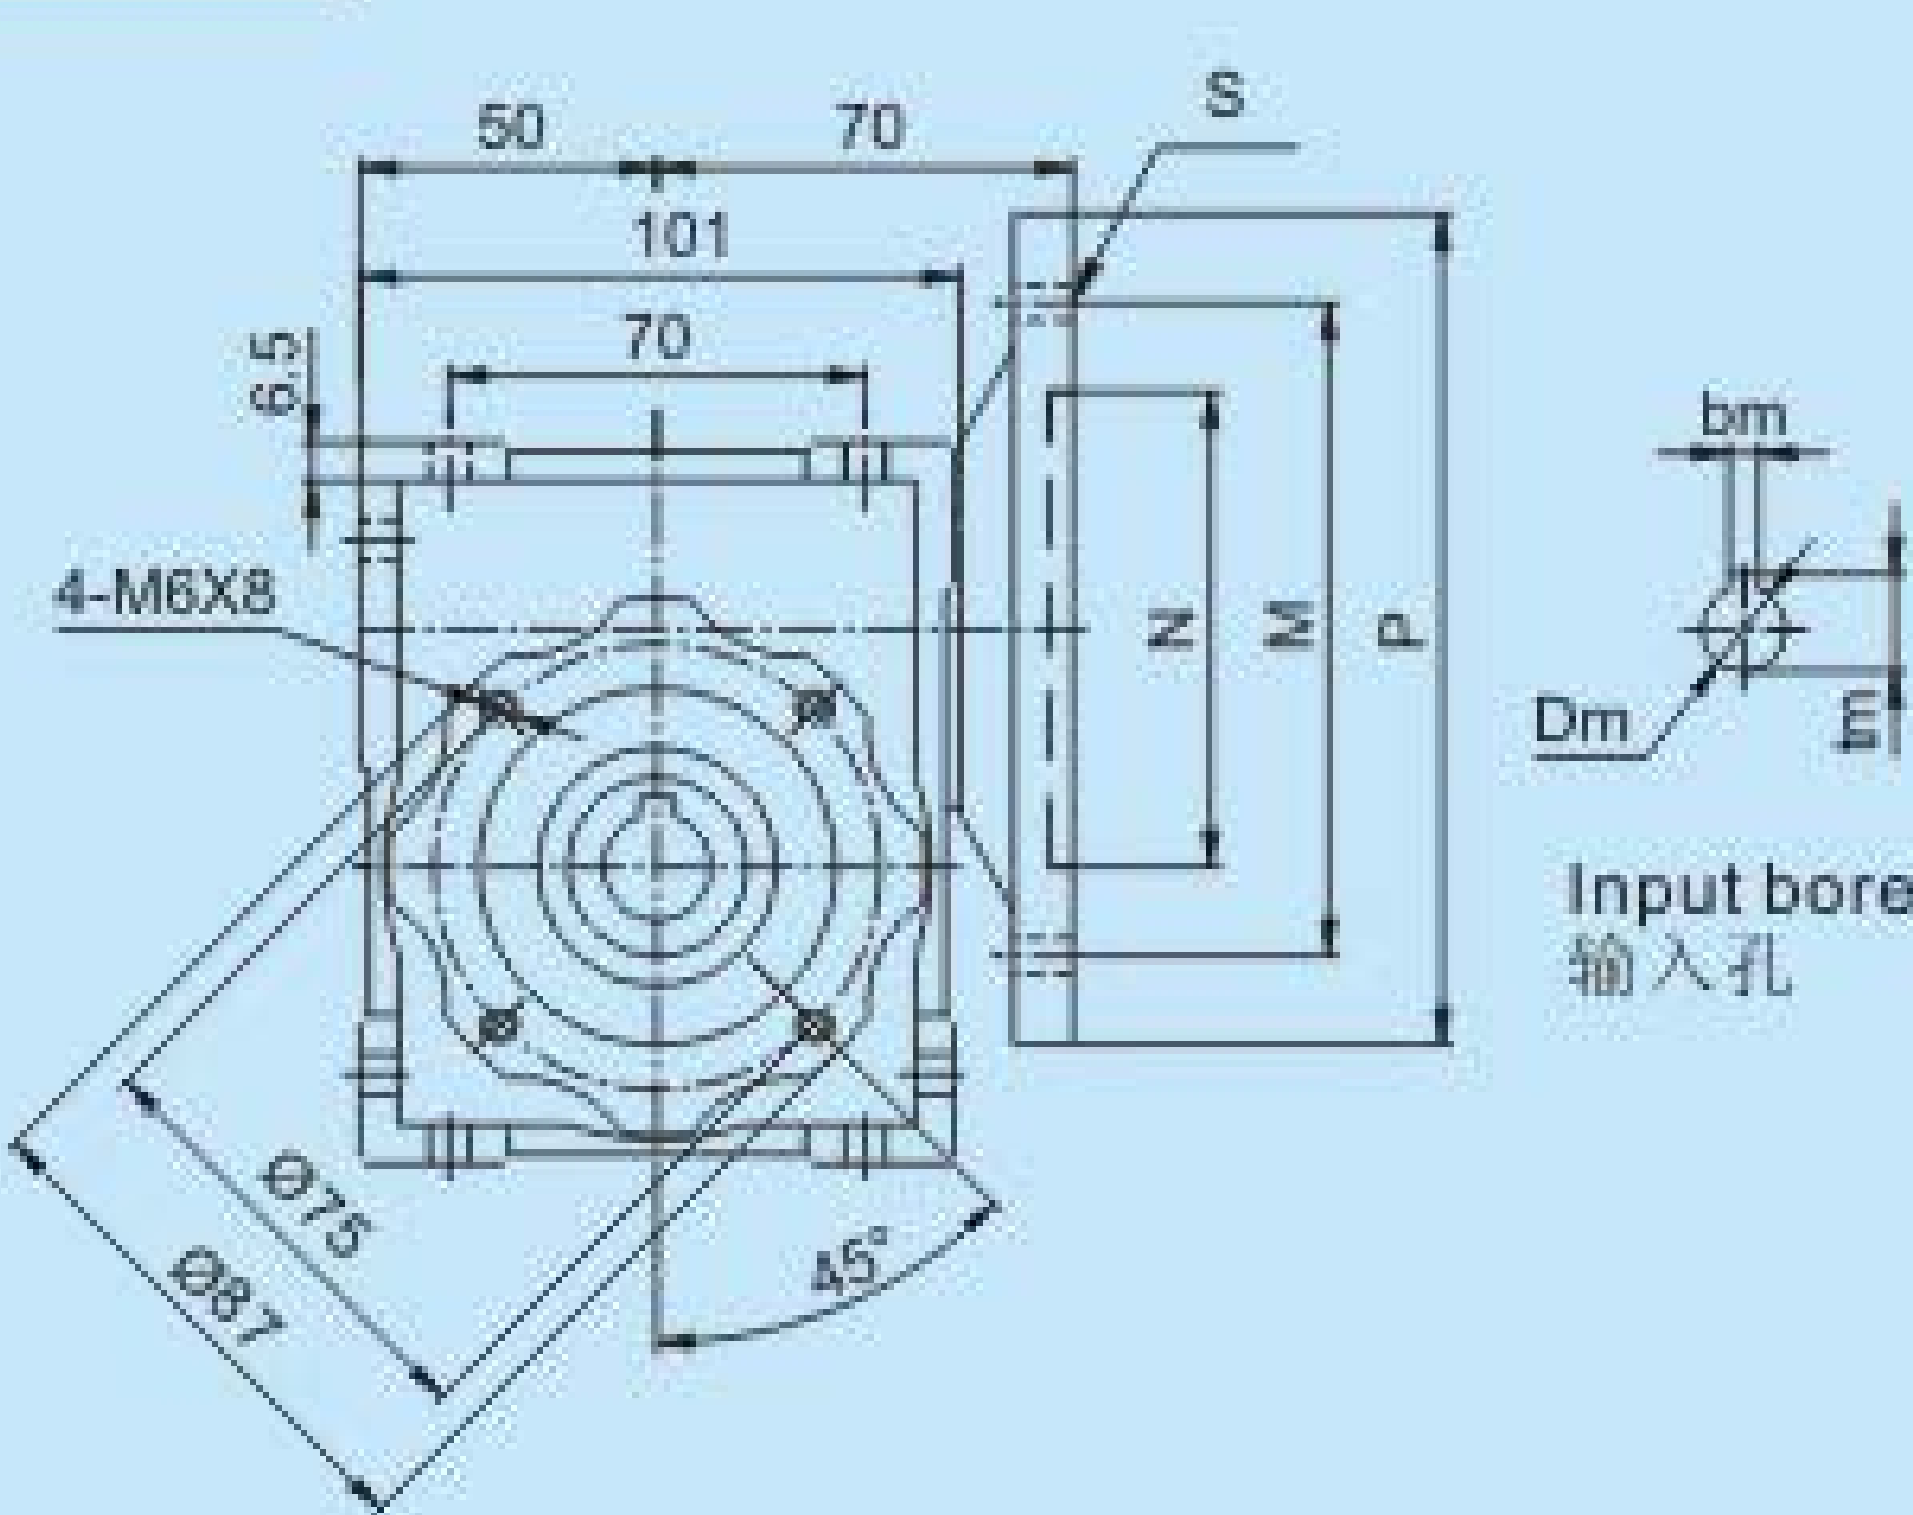

Input bore
输入孔

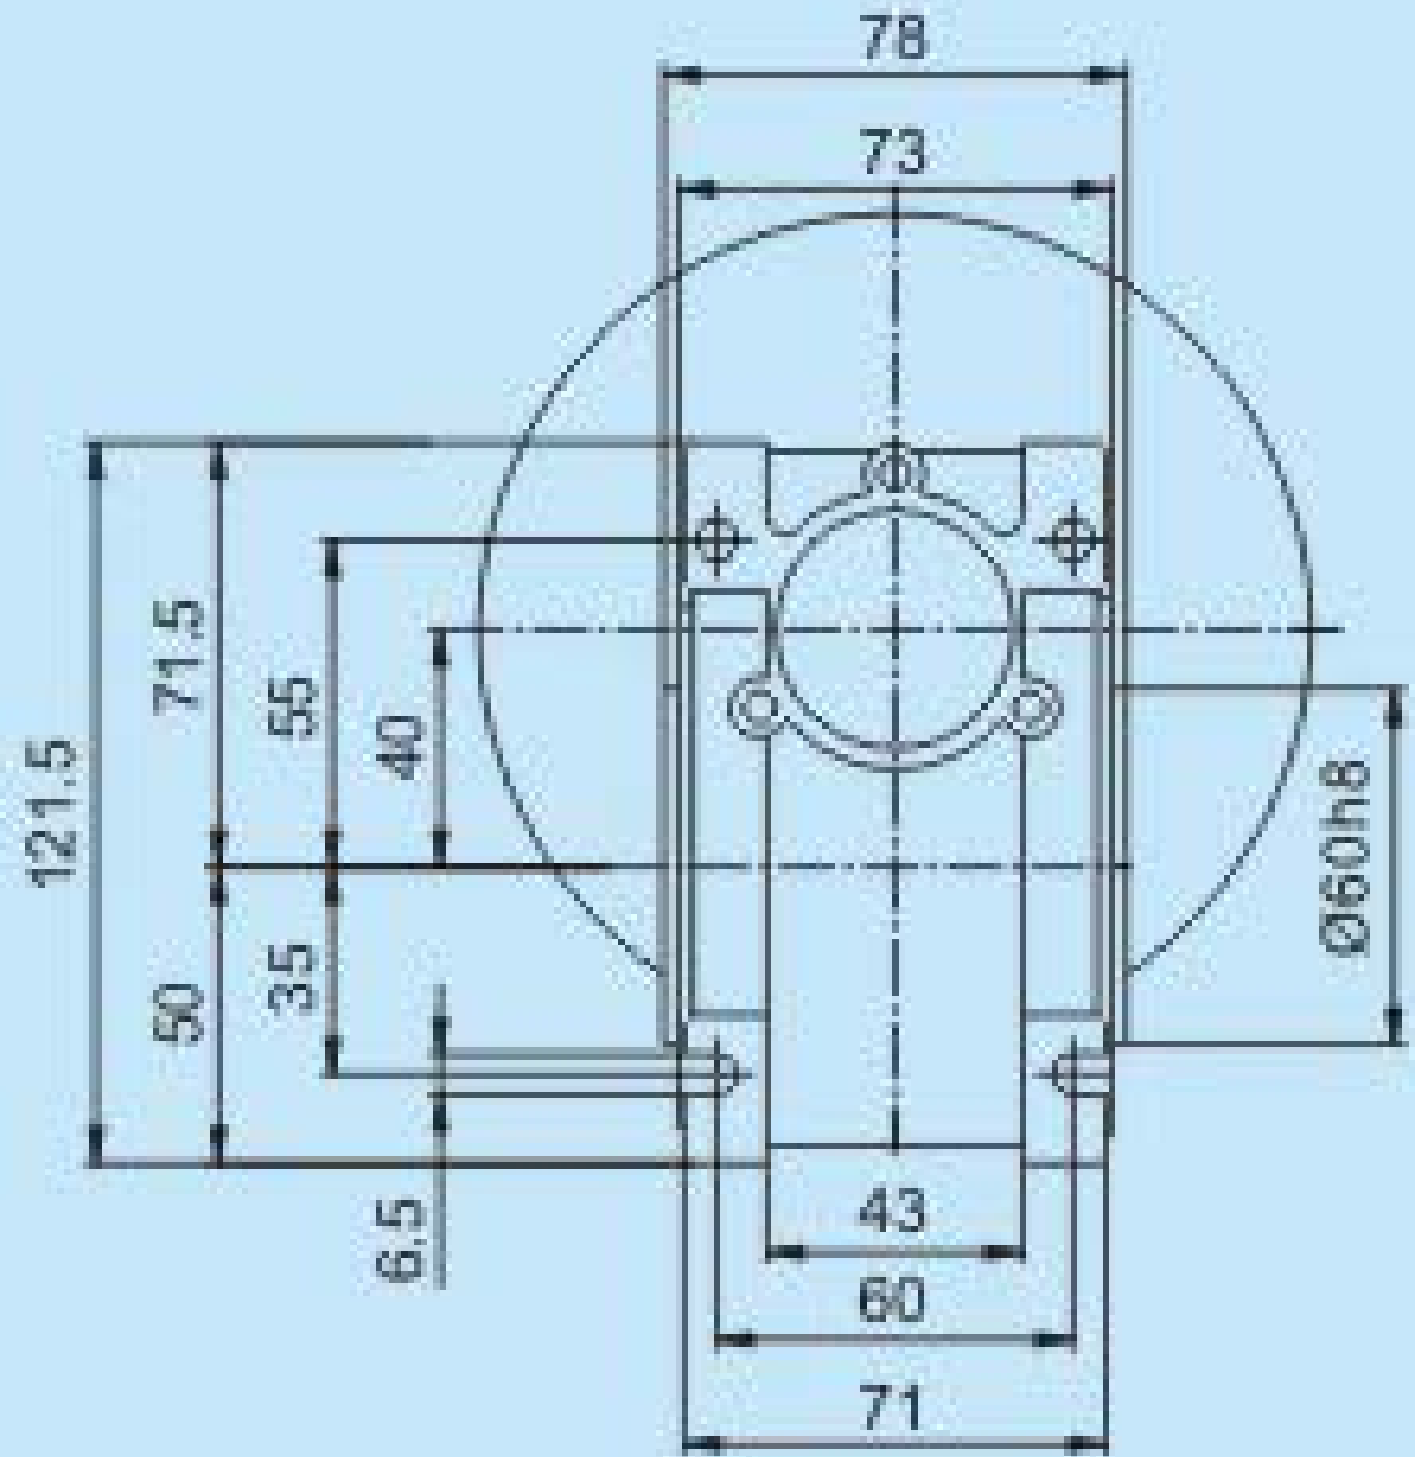

HMRV. VS

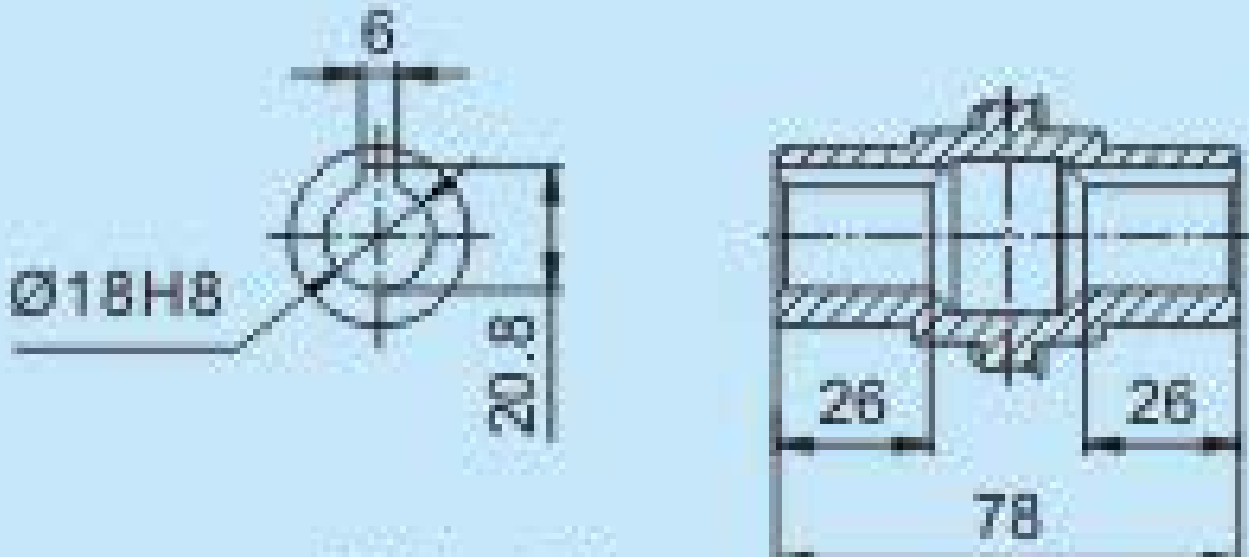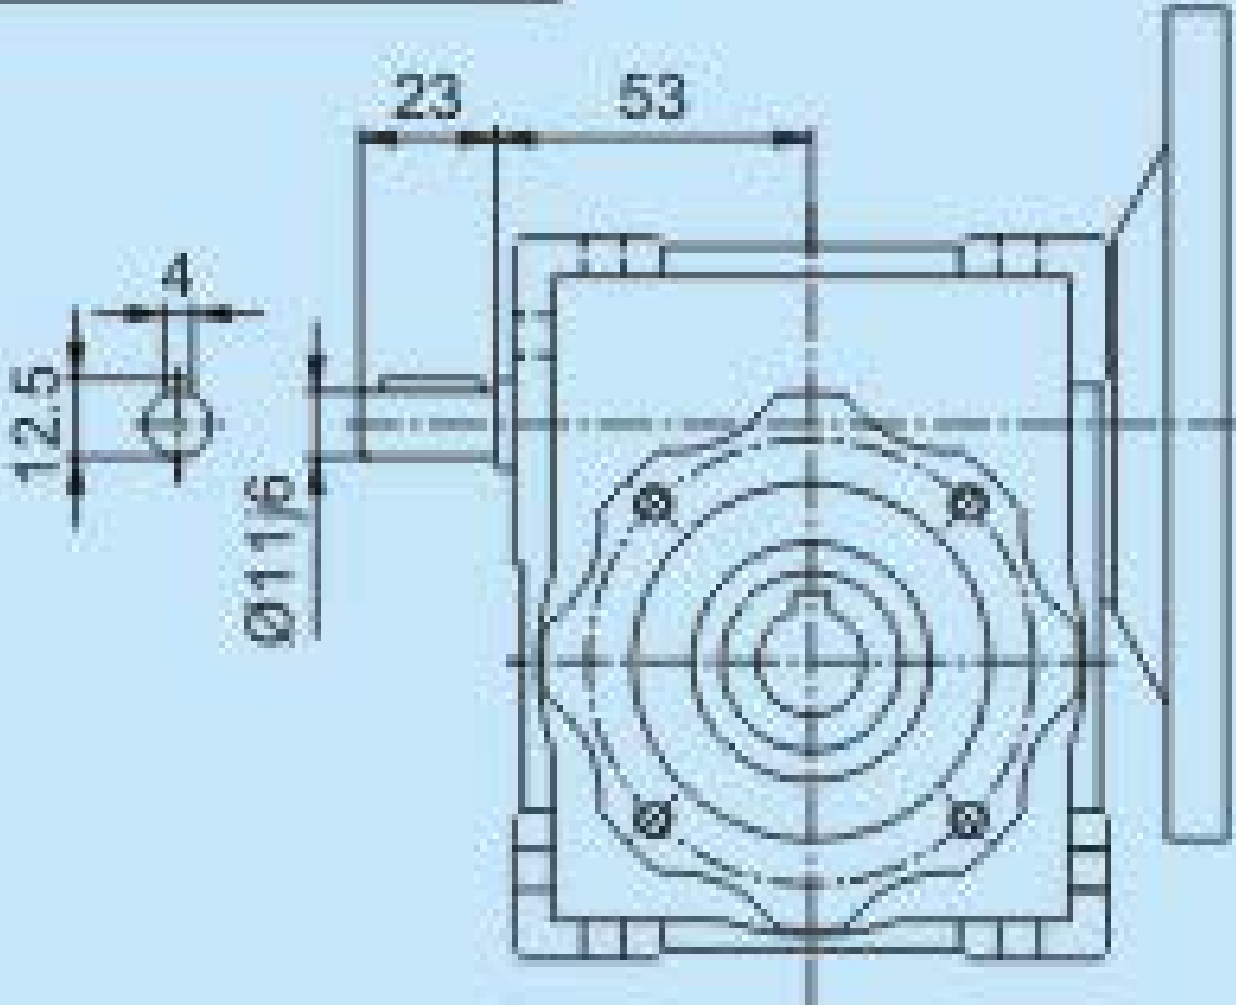

Output bore
输出孔





PAM-IEC 适用电机	N (H8)	M	P	bm	tm	S	Dm (H7)												Depth 深
							5	7.5	10	15	20	25	30	40	50	60	80	100	
71B5	Ø110	Ø130	Ø160	5	16.3	Ø11	14	14	14	14	14	14	14	14	-	-	-	-	30
71B14	Ø70	Ø85	Ø105	5	16.3	Ø7													
63B5	Ø95	Ø115	Ø140	4	12.8	Ø9	11	11	11	11	11	11	11	11	11	11	11	11	23
63B14	Ø60	Ø75	Ø90	4	12.8	Ø6													
56B5	Ø80	Ø100	Ø120	3	10.4	Ø7	-	-	-	-	-	-	-	-	9	9	9	9	23

Weight : 2.4kg


重量 : 2.4kg

HMRV



050

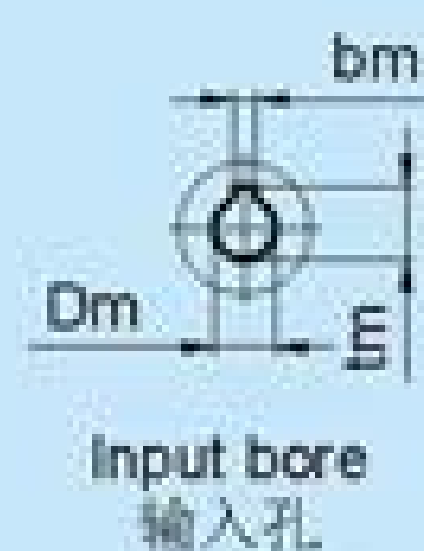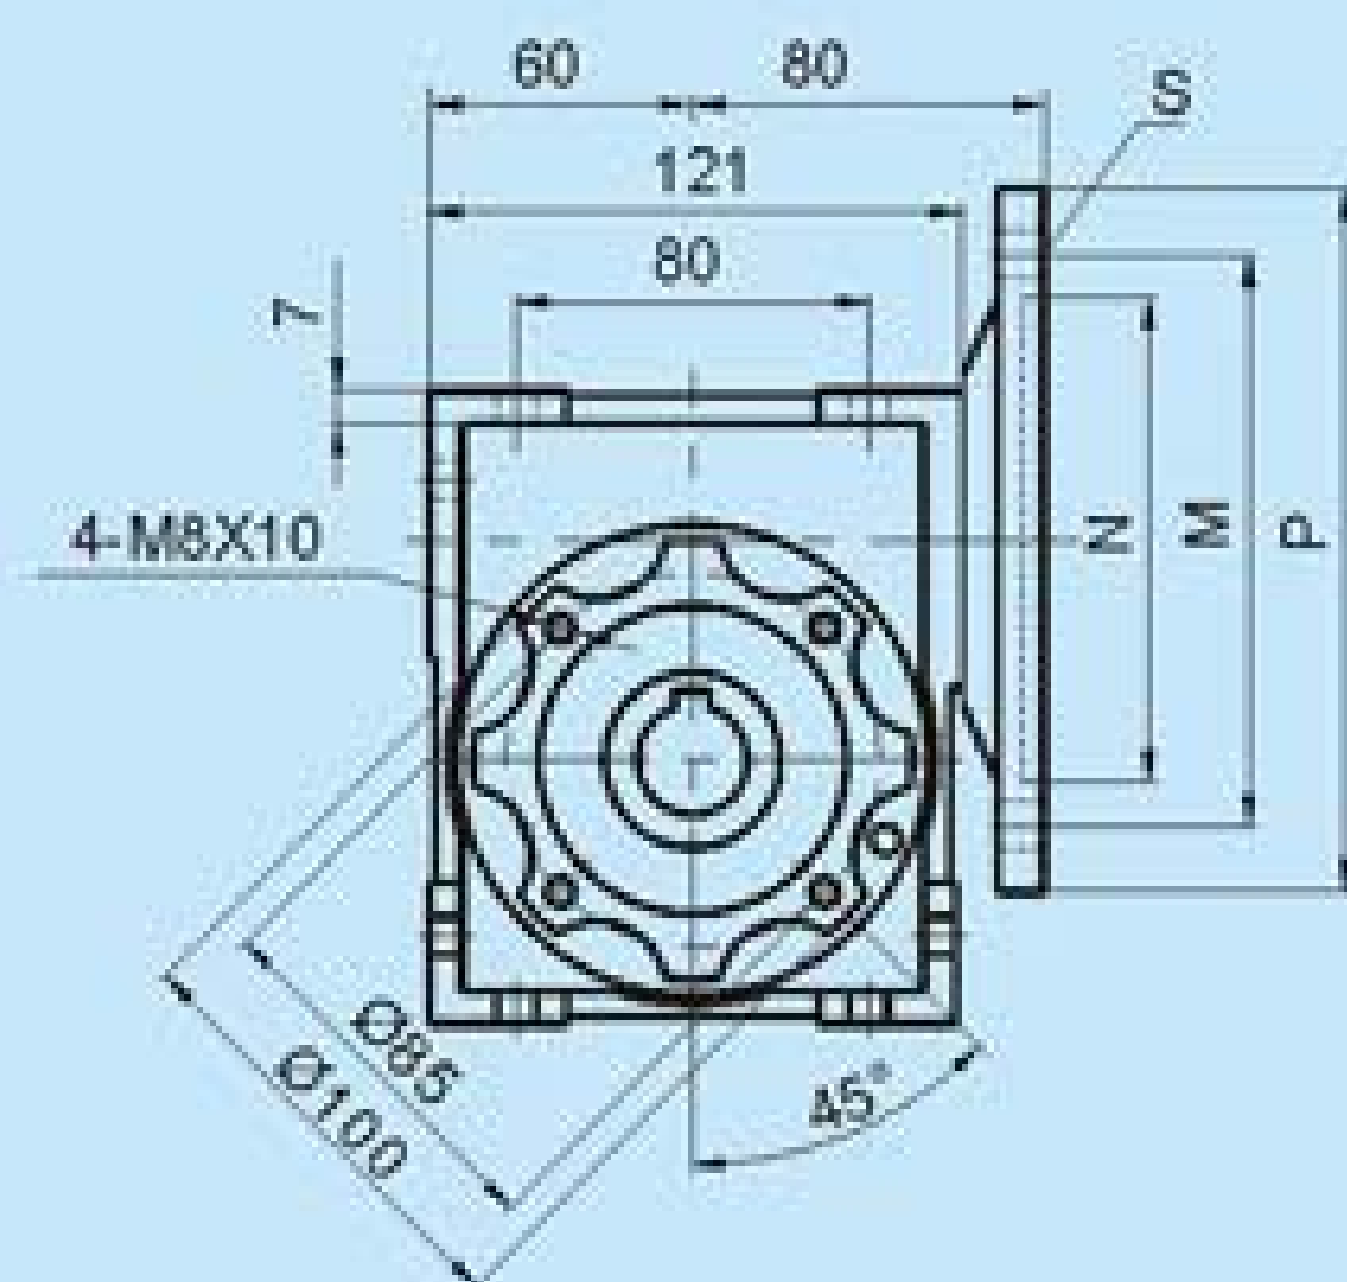

Input bore
输入孔

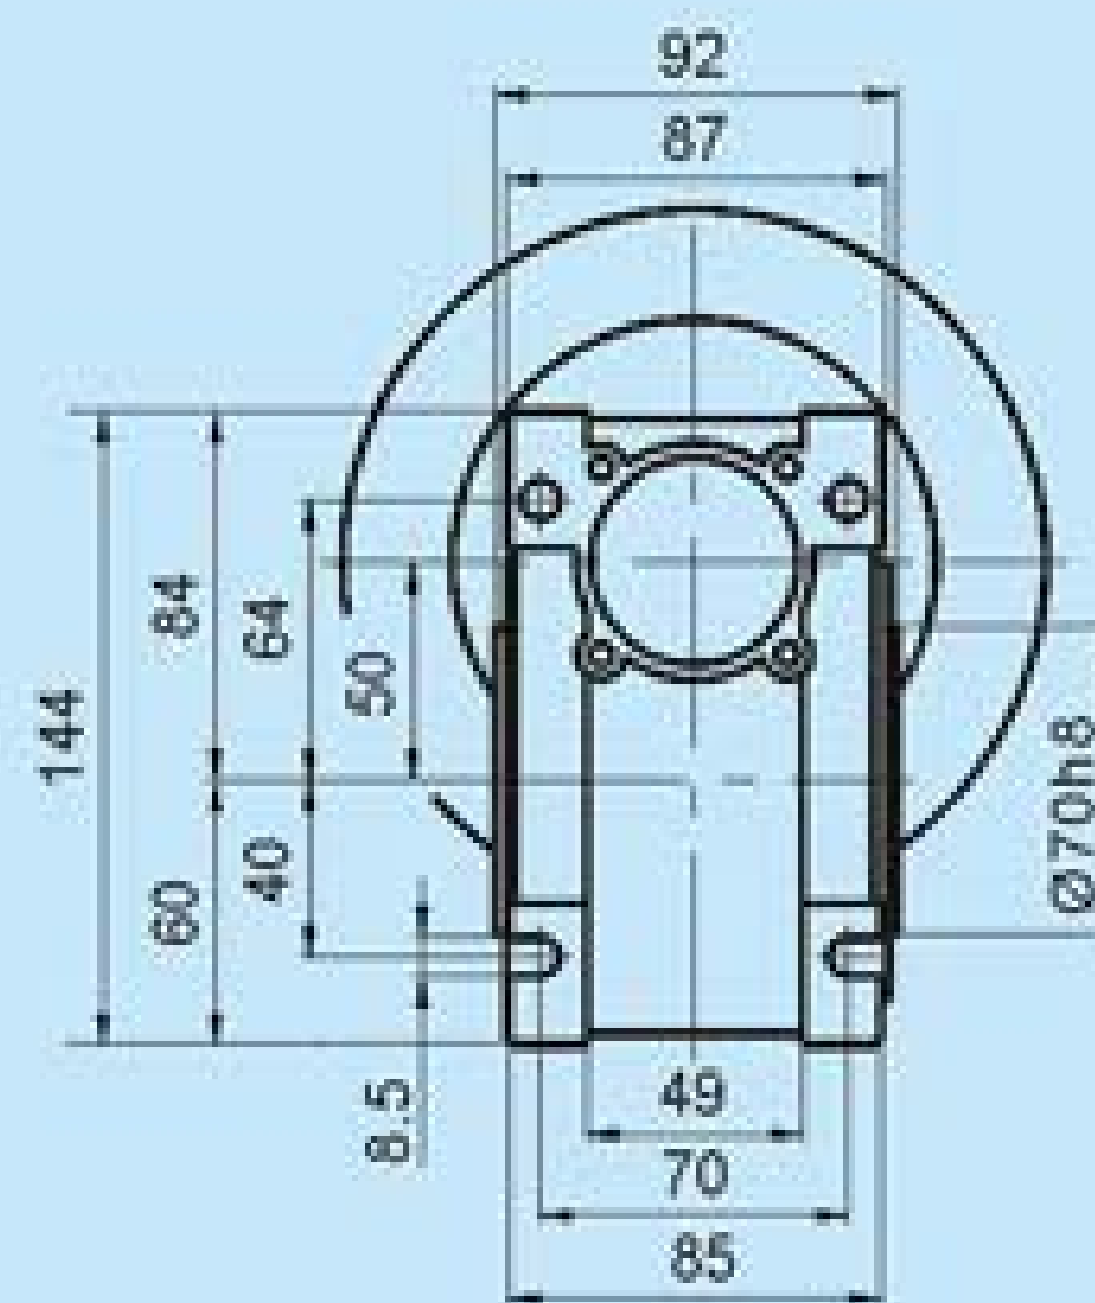

HMRV. VS

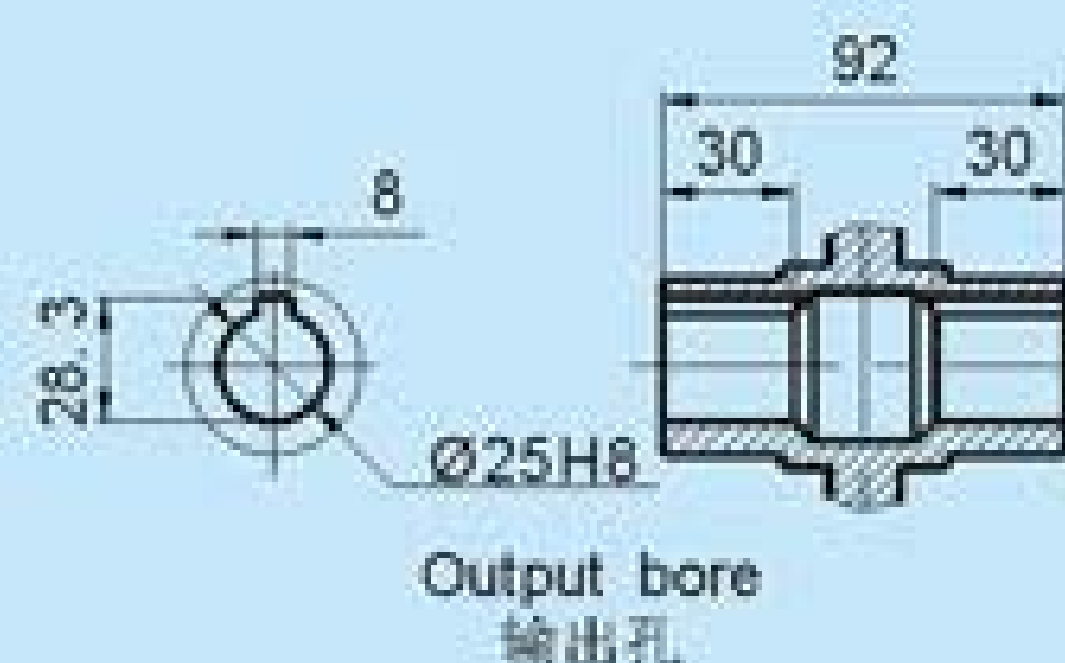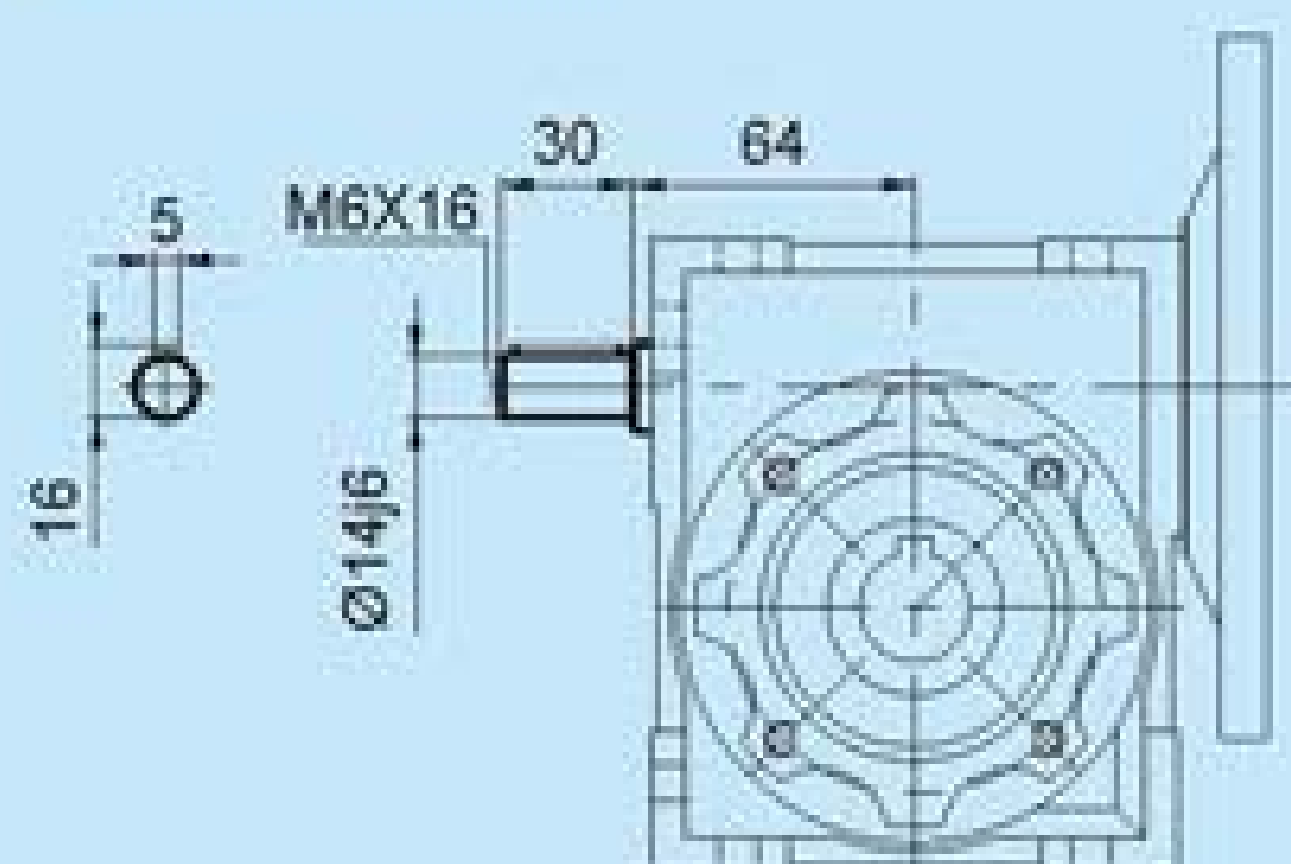




Output bore
输出孔



PAM-IEC 适用电机	N (H8)	M	P	bm	tm	S	Dm (H7)												
							5	7.5	10	15	20	25	30	40	50	60	80	100	Depth 深
80B5	Ø130	Ø165	Ø200	6	21.8	Ø11	19	19	19	19	19	19	19	-	-	-	-	-	40
80B14	Ø80	Ø100	Ø120	6	21.8	Ø7													
71B5	Ø110	Ø130	Ø160	5	16.3	Ø11	14	14	14	14	14	14	14	14	14	14	14	-	30
71B14	Ø70	Ø85	Ø105	5	16.3	Ø7													
63B5	Ø95	Ø115	Ø140	4	12.8	Ø9	-	-	-	-	-	-	-	11	11	11	11	11	23
63B14	Ø60	Ø75	Ø90	4	12.8	Ø6	-	-	-	-	-	-	-	11	11	11	11	11	23

Weight : 3.6kg

重量 : 3.6kg

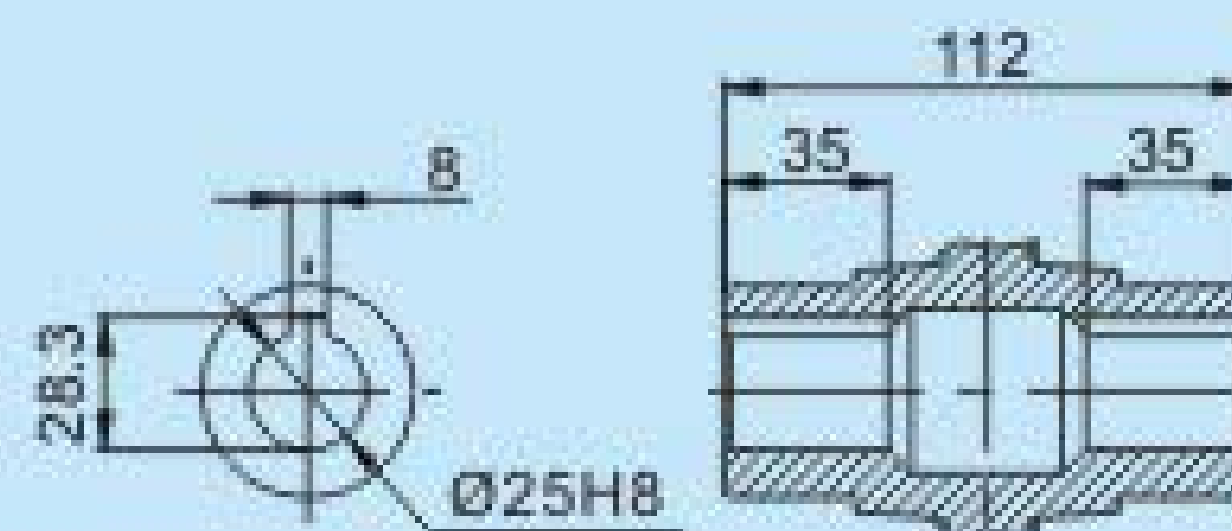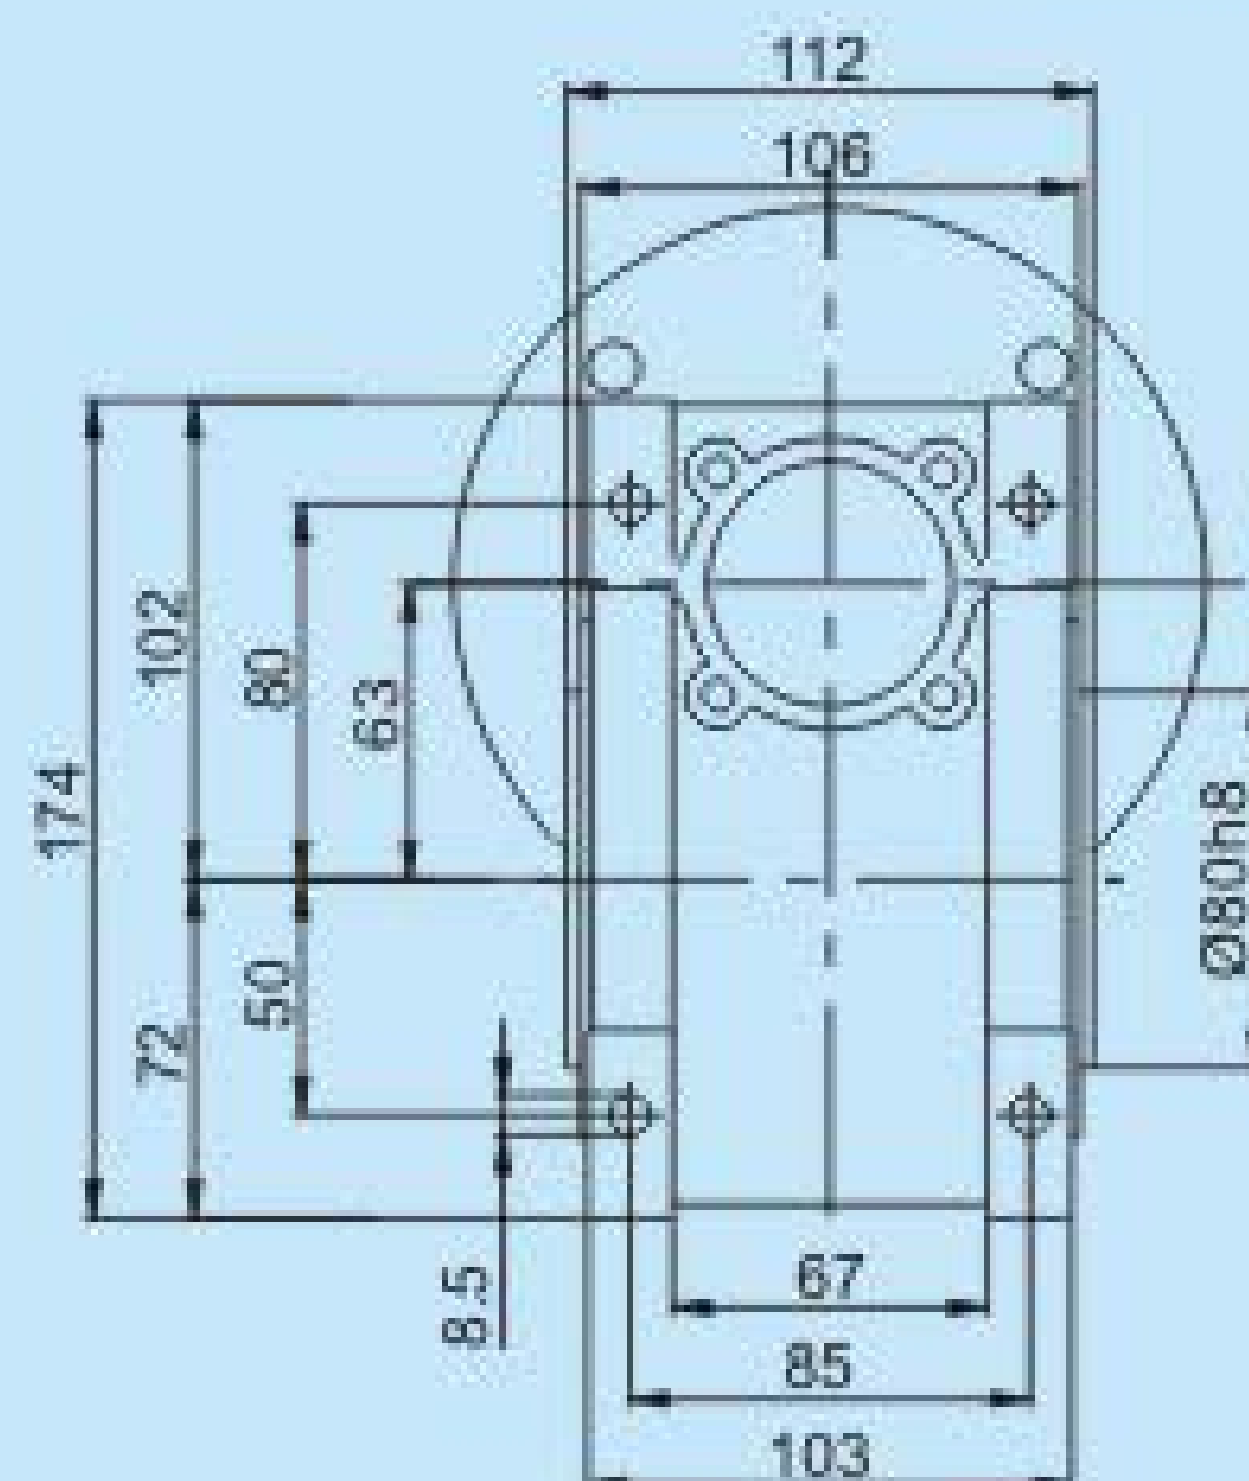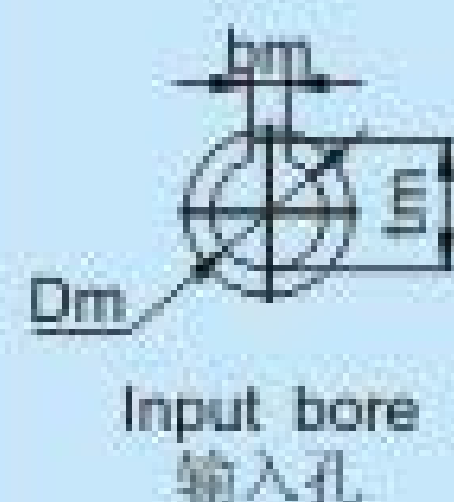




Output bore
输出孔





Weight : 6.3kg

Figure 6

HMRV

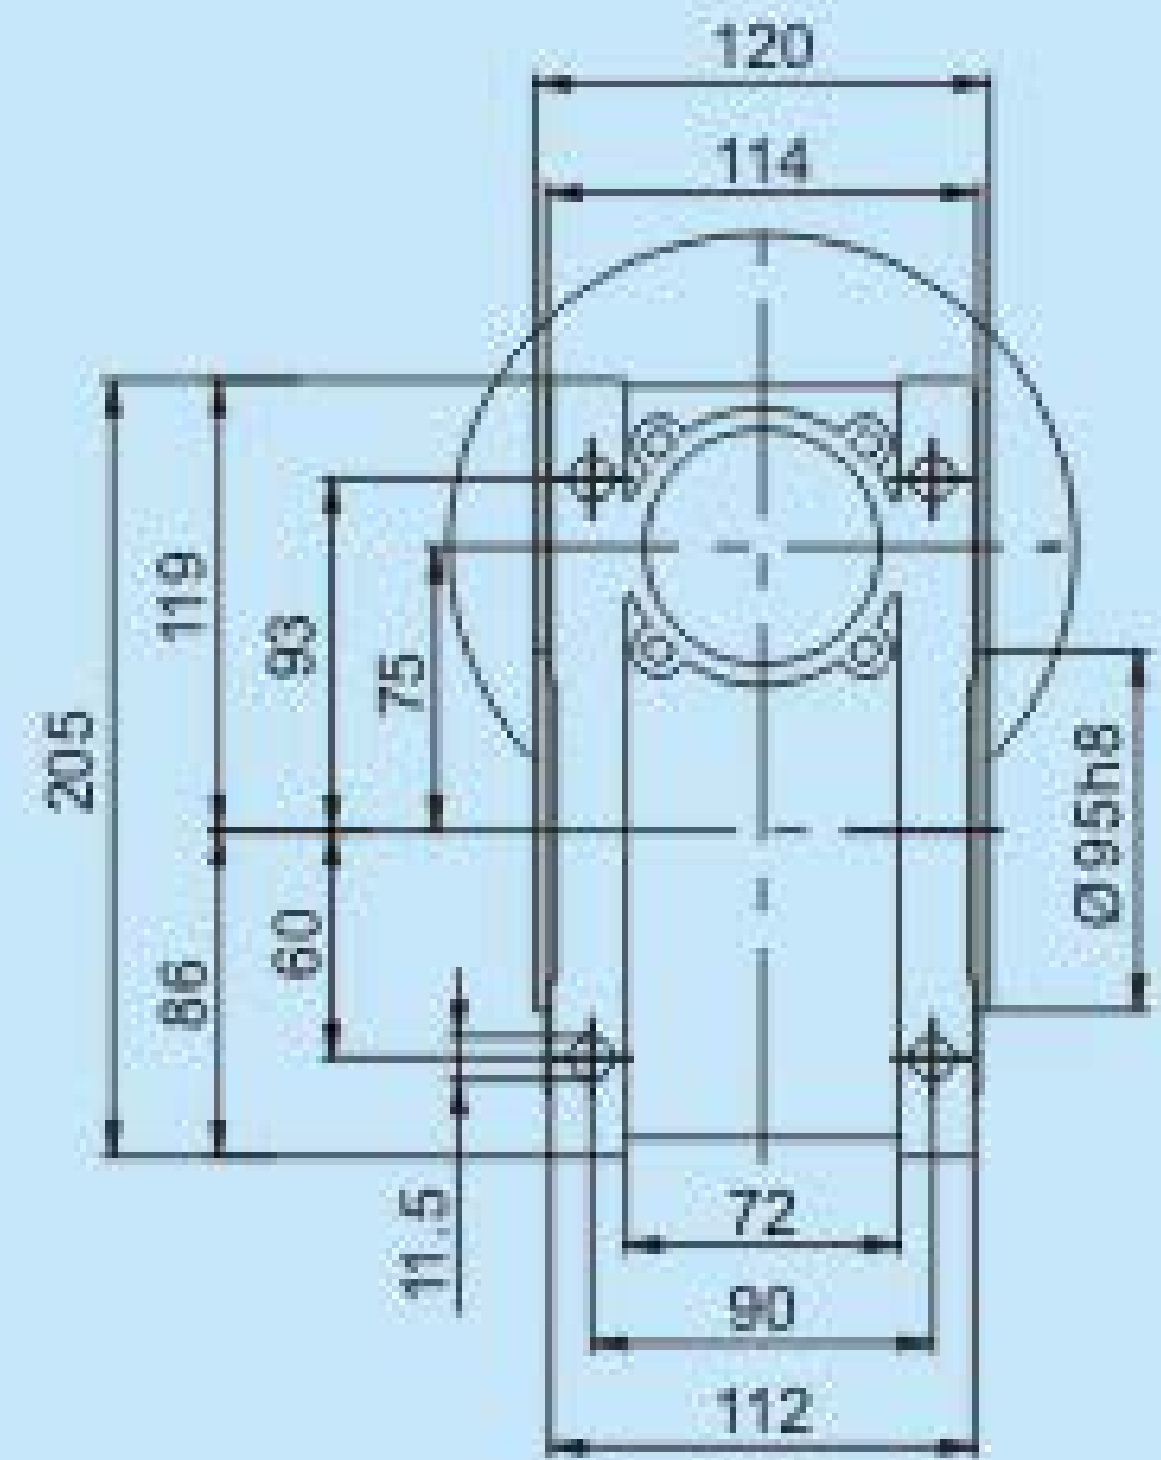
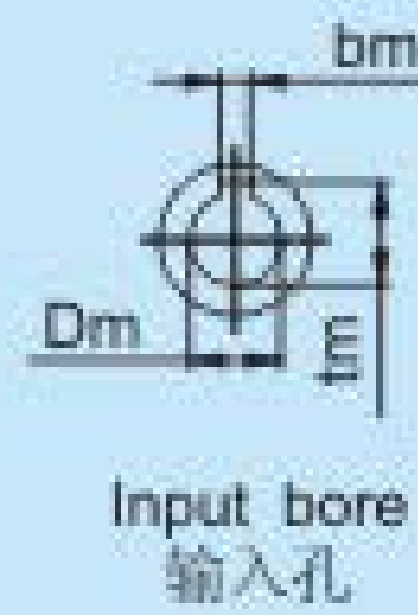
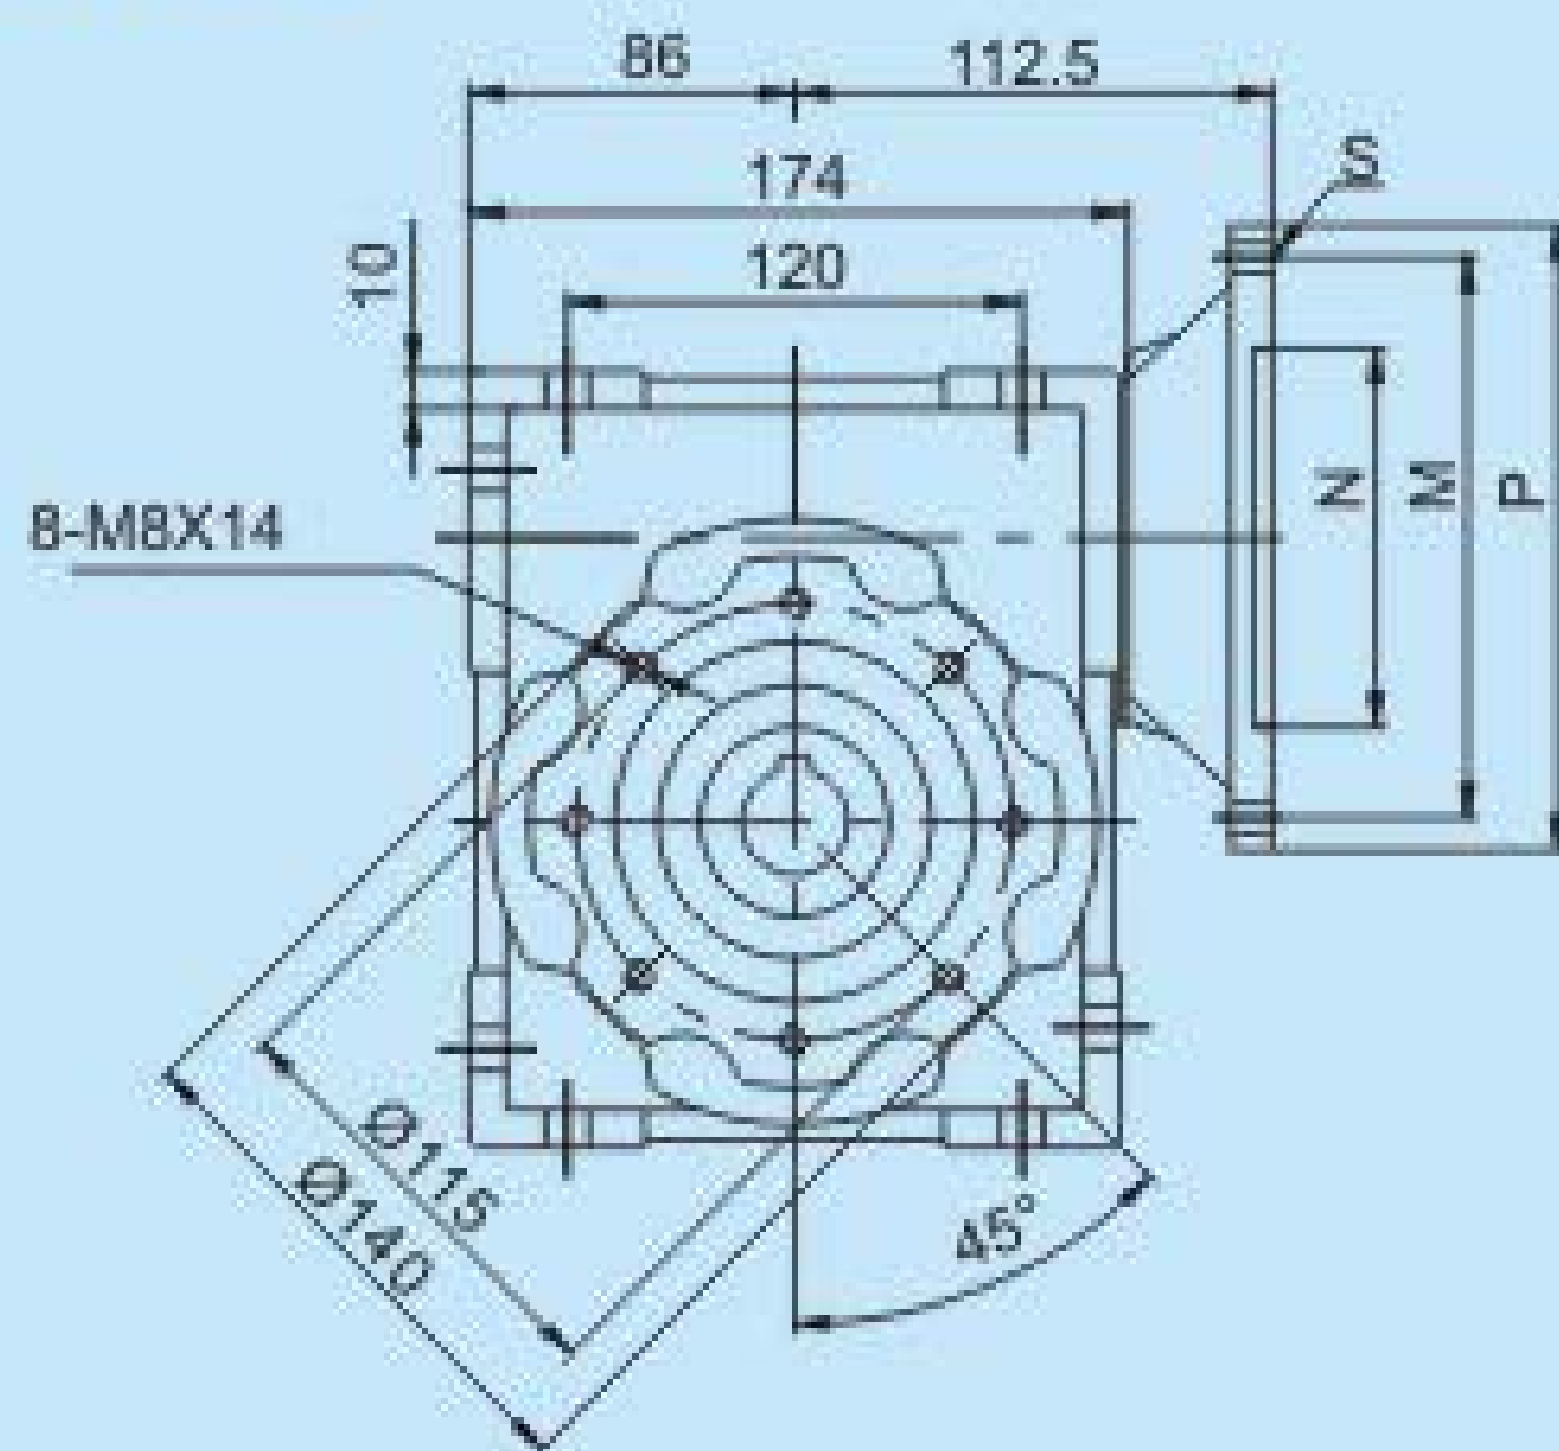


HMRV. VS

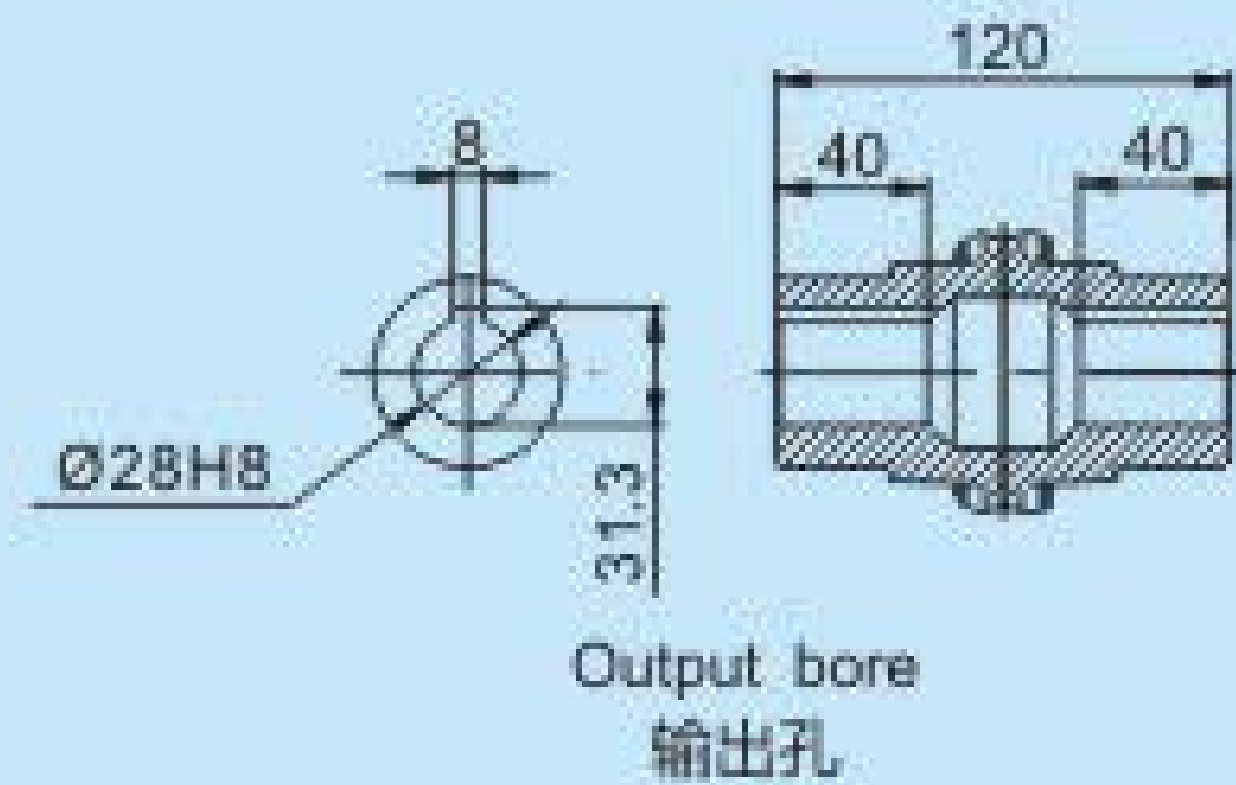
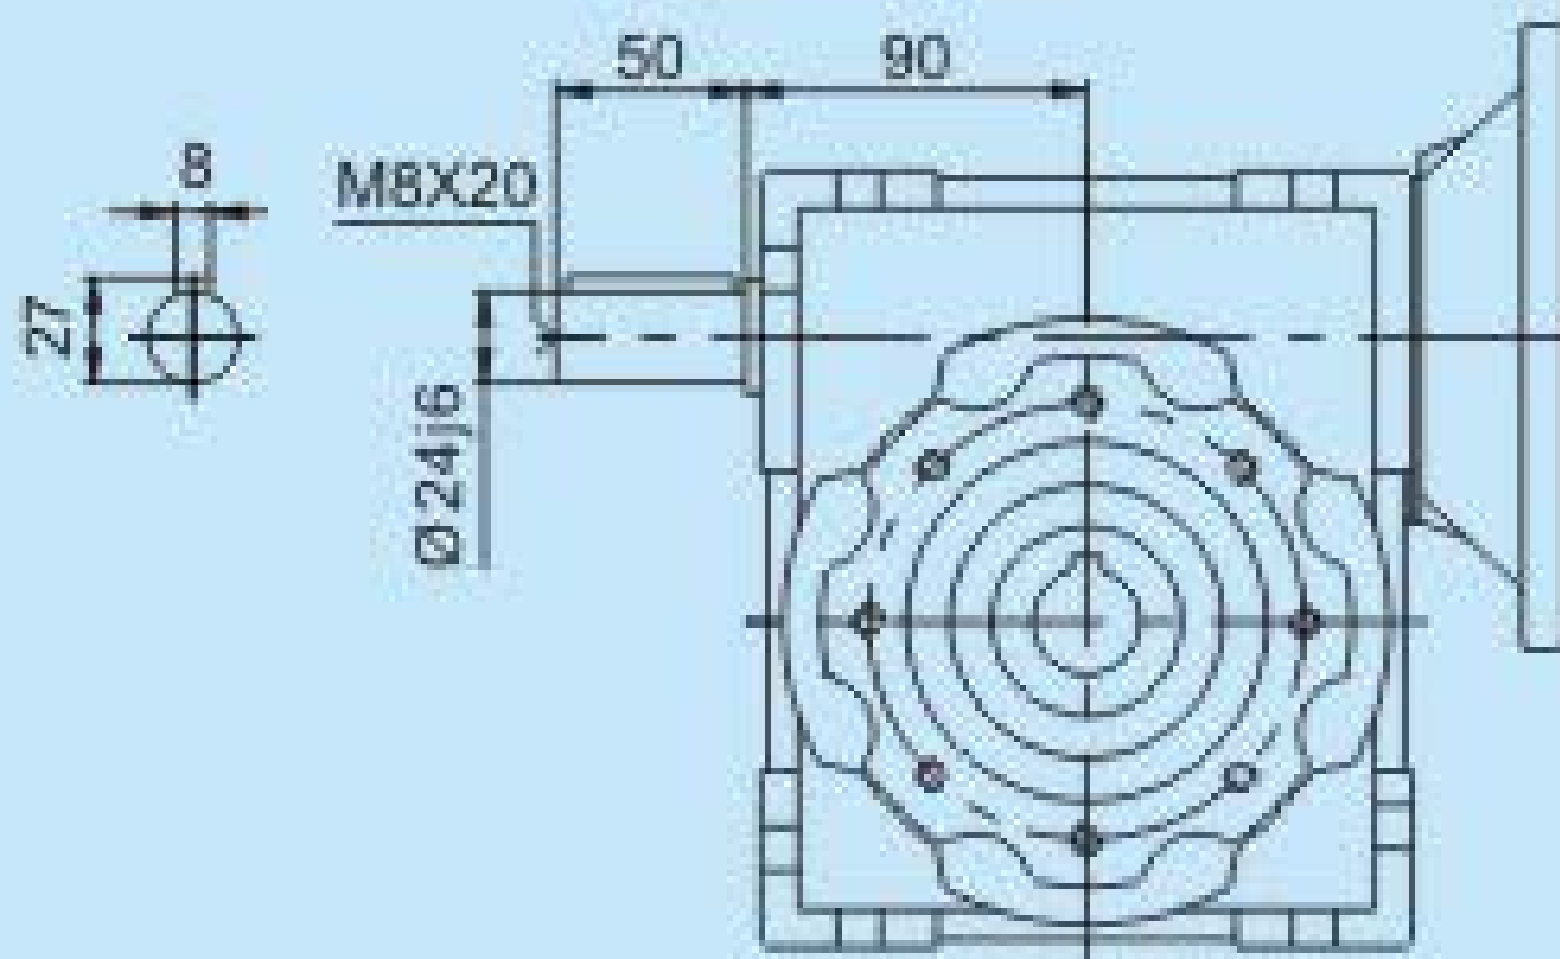


PAM-IEC 适用电机	N (H8)	M	P	bm	tm	S	Dm (H7)												
							5	7.5	10	15	20	25	30	40	50	60	80	100	Depth 深
100/112B5	Ø180	Ø215	Ø250	8	31.3	Ø15	—	28	28	28	—	—	—	—	—	—	—	—	60
100/112B14	Ø110	Ø130	Ø160	8	31.3	Ø9													
90B5	Ø130	Ø165	Ø200	8	27.3	Ø11	—	24	24	24	24	24	24	24	—	—	—	—	50
90B14	Ø95	Ø115	Ø140	8	27.3	Ø9													
80B5	Ø130	Ø165	Ø200	6	21.8	Ø11	—	—	—	—	19	19	19	19	19	19	19	19	40
80B14	Ø80	Ø100	Ø120	6	21.8	Ø7													
71B5	Ø110	Ø130	Ø160	5	16.3	Ø11	—	—	—	—	—	—	—	—	14	14	14	14	30

Weight : 9kg

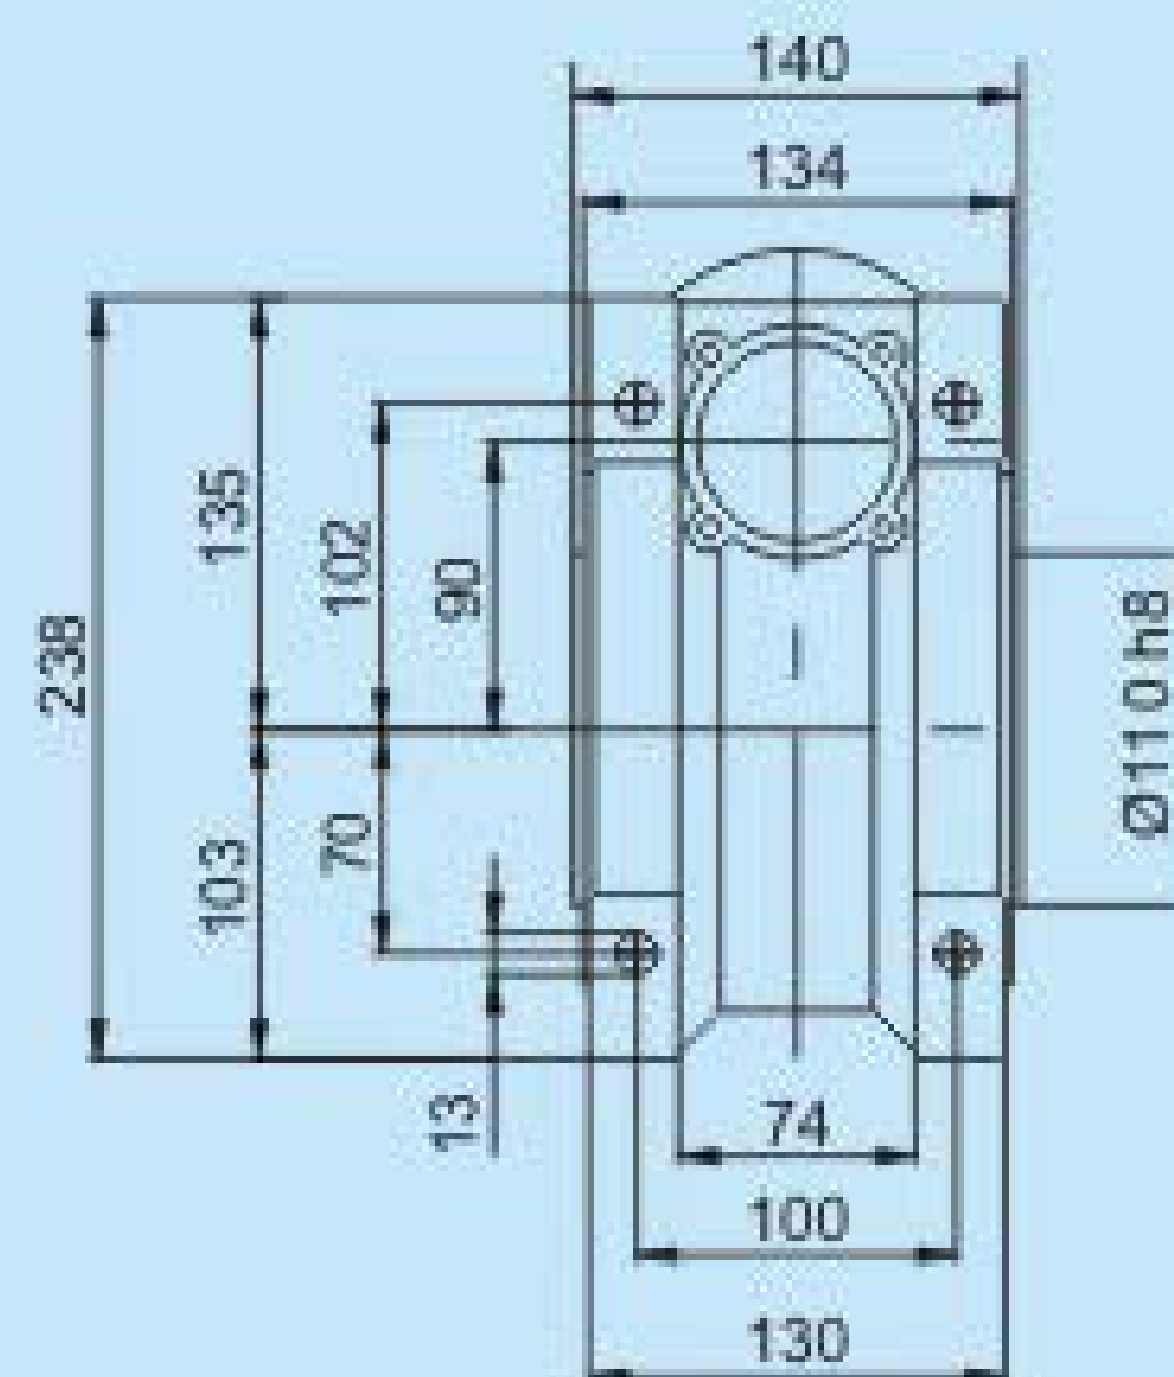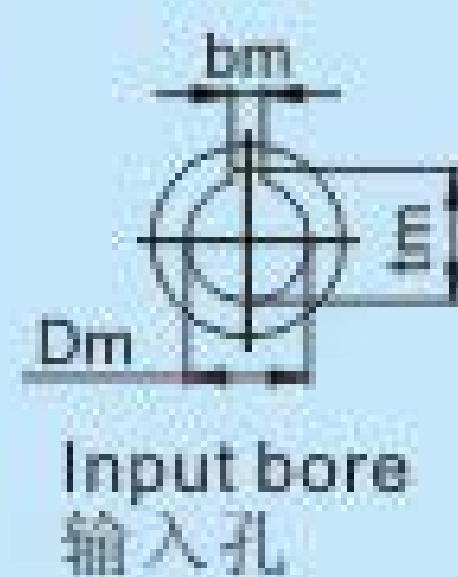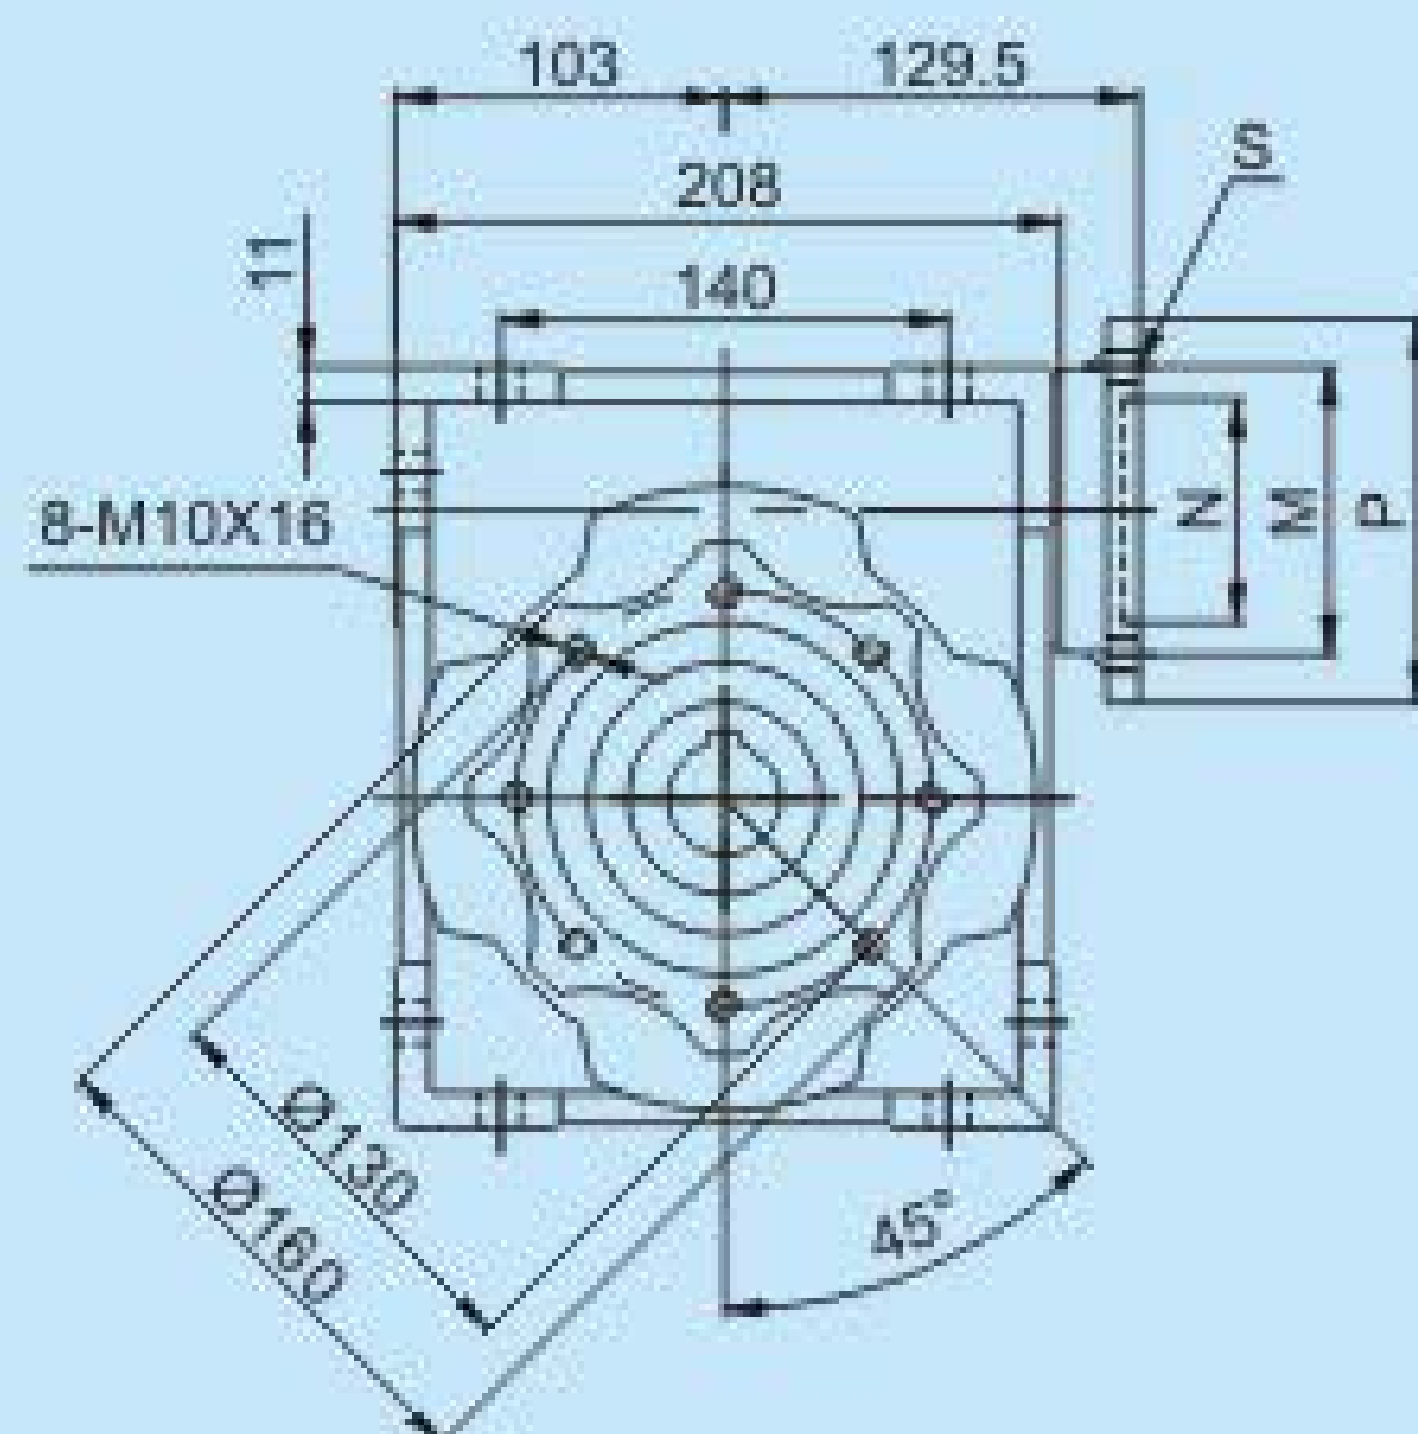

HMRV. VS

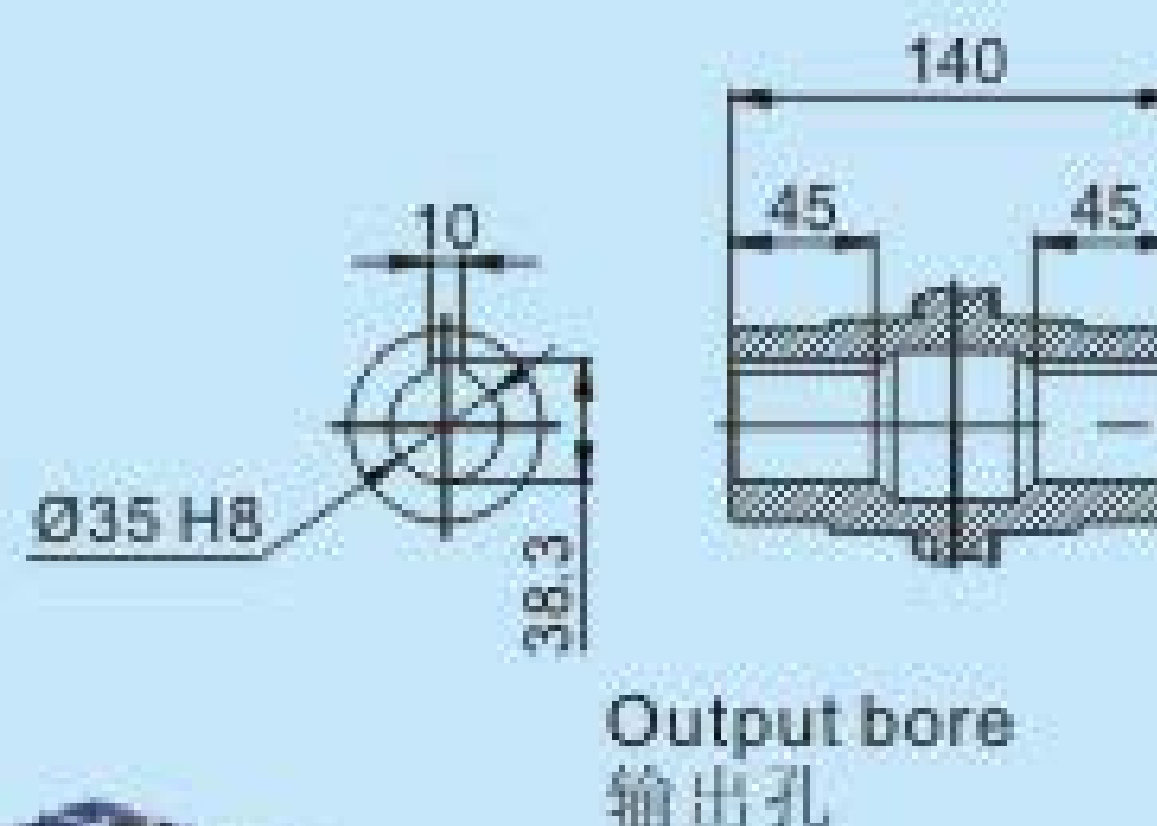
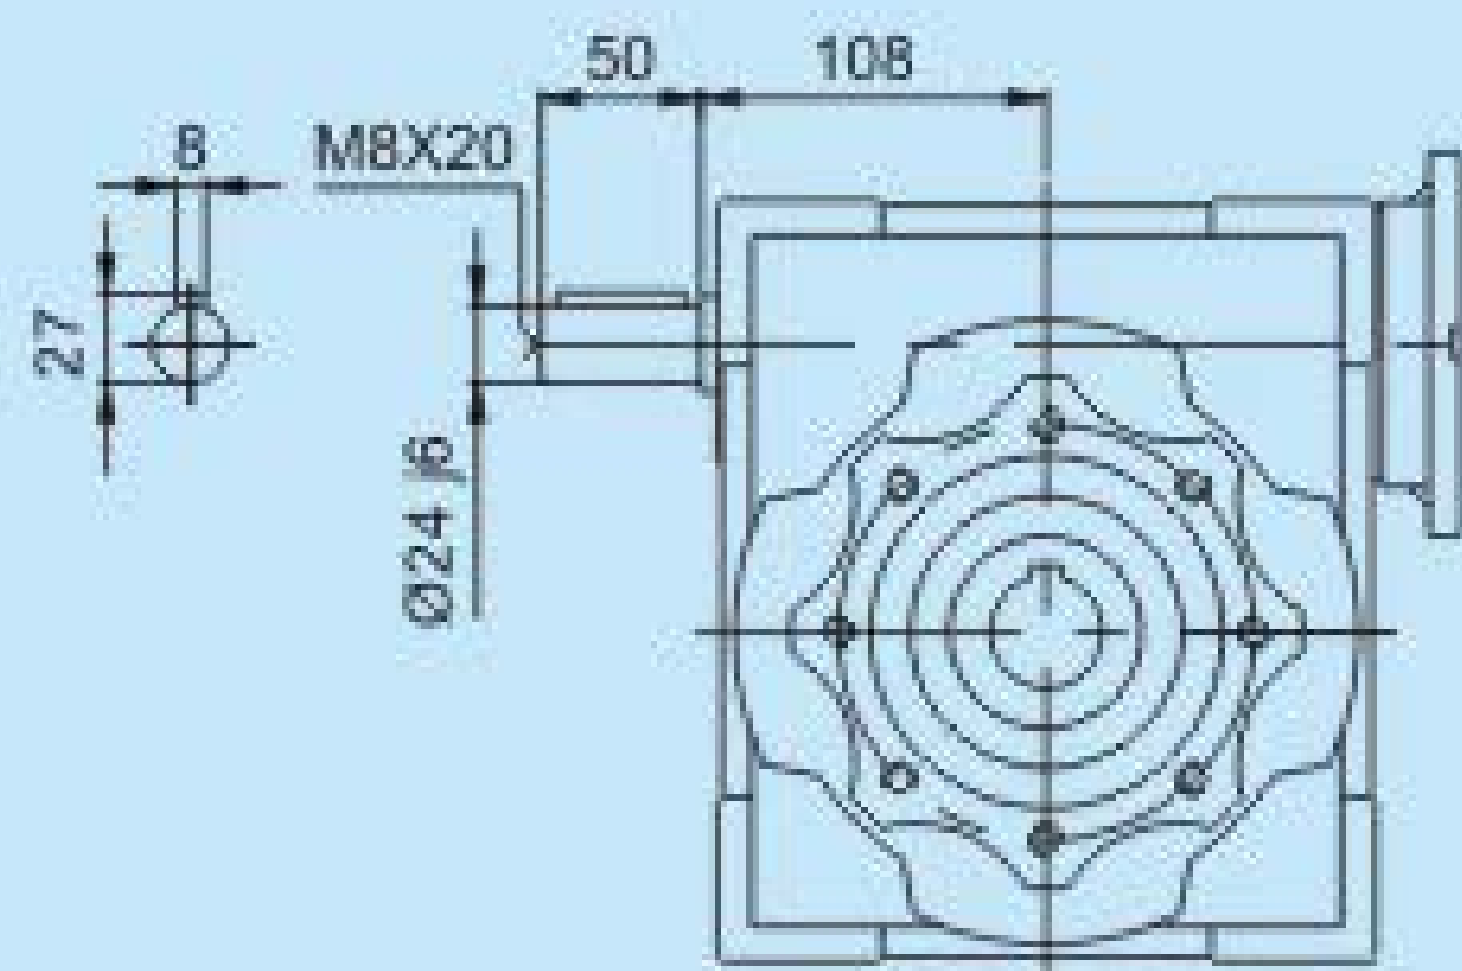


PAM-IEC 适用电机	N (H8)	M	P	bm	tm	S	Dm (H7)												
							5	7.5	10	15	20	25	30	40	50	60	80	100	Depth 深
100/112B5	Ø180	Ø215	Ø250	8	31.3	Ø15	-	28	28	28	28	28	28	-	-	-	-	-	60
100/112B14	Ø110	Ø130	Ø160	8	31.3	Ø9													
90B5	Ø130	Ø165	Ø200	8	27.3	Ø11	-	24	24	24	24	24	24	24	24	24	-	-	50
90B14	Ø95	Ø115	Ø140	8	27.3	Ø9													
80B5	Ø130	Ø165	Ø200	6	21.8	Ø11	-	-	-	-	-	-	-	19	19	19	19	19	40
80B14	Ø80	Ø100	Ø120	6	21.8	Ø7													


Weight : 13kg

重量 : 13kg



HMRV

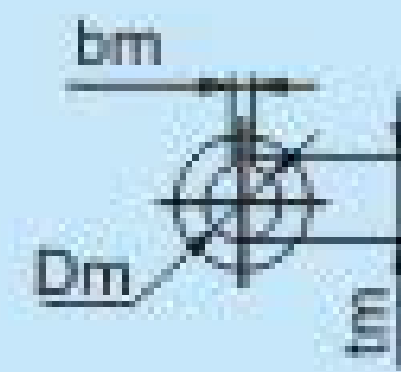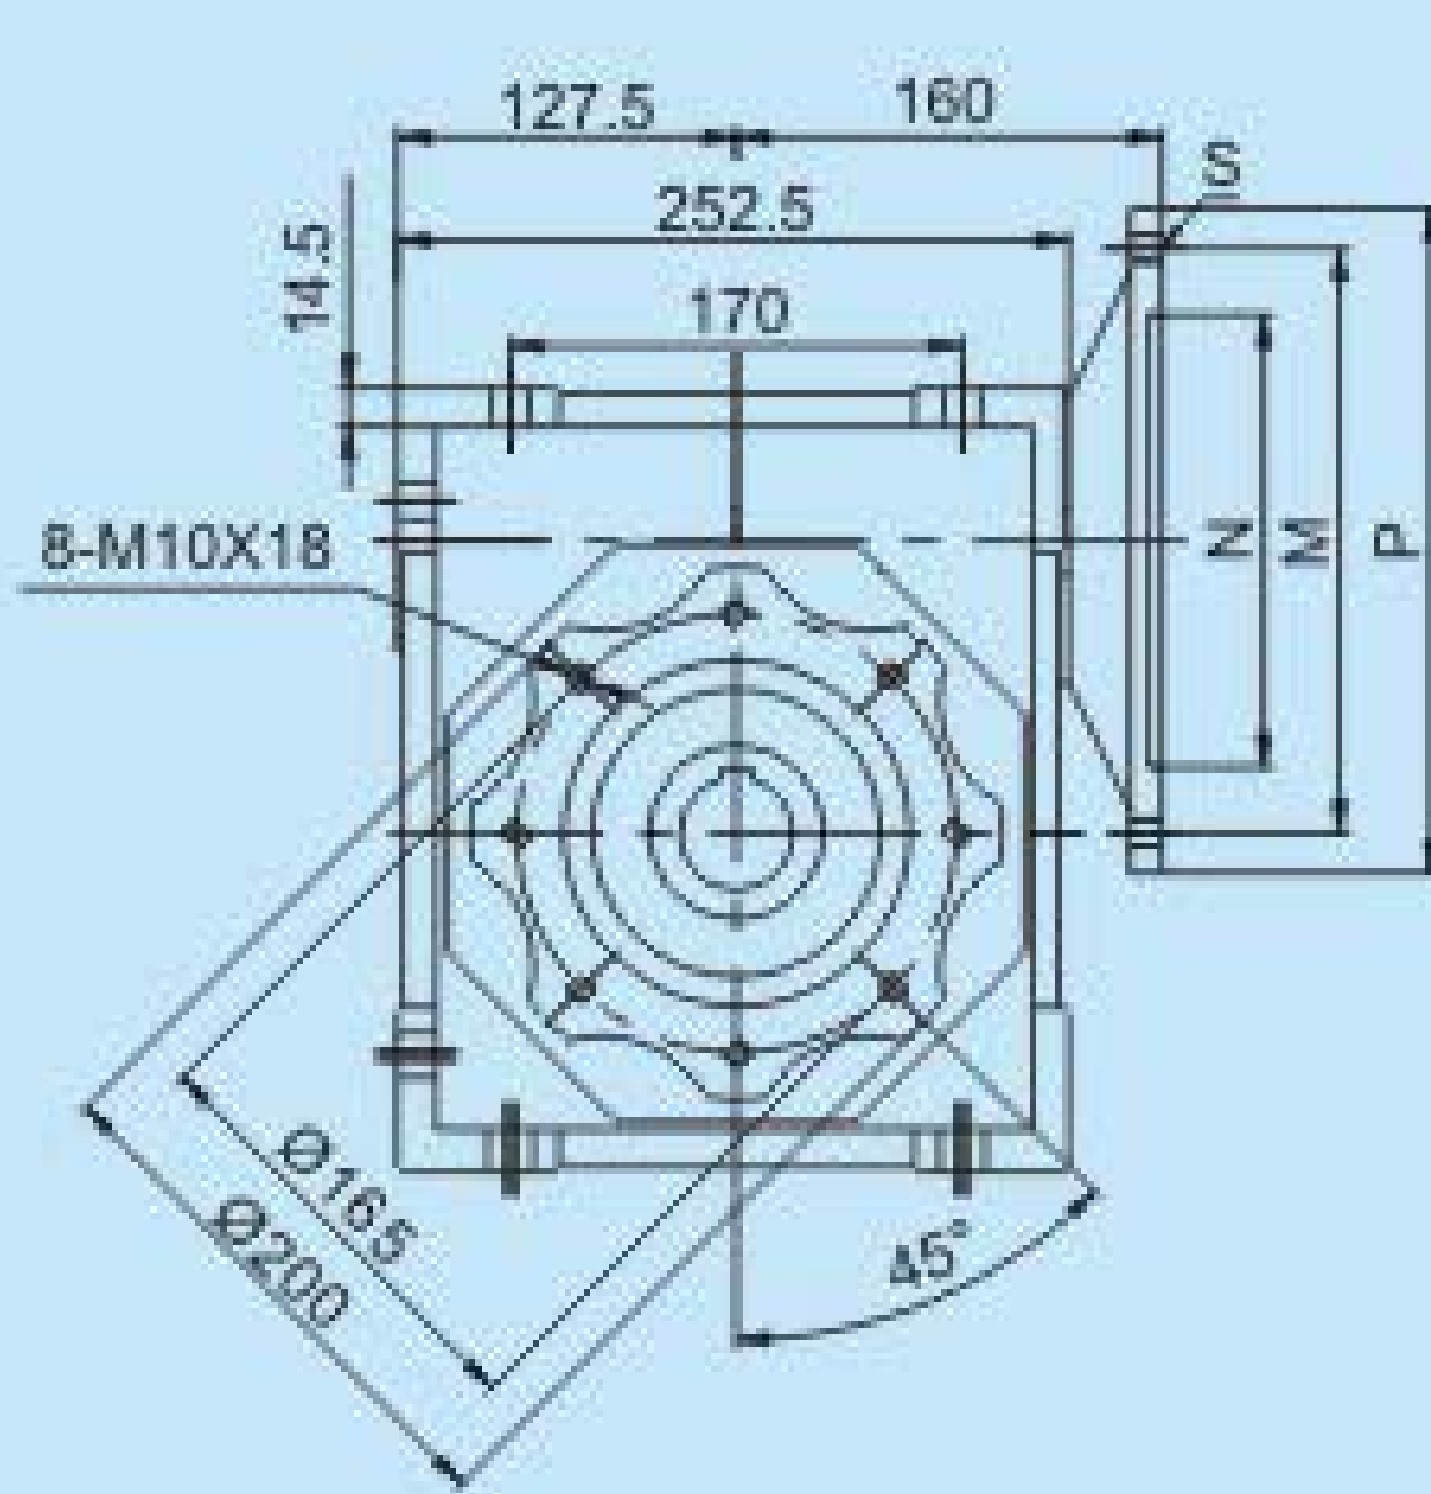

Input bore
输入孔

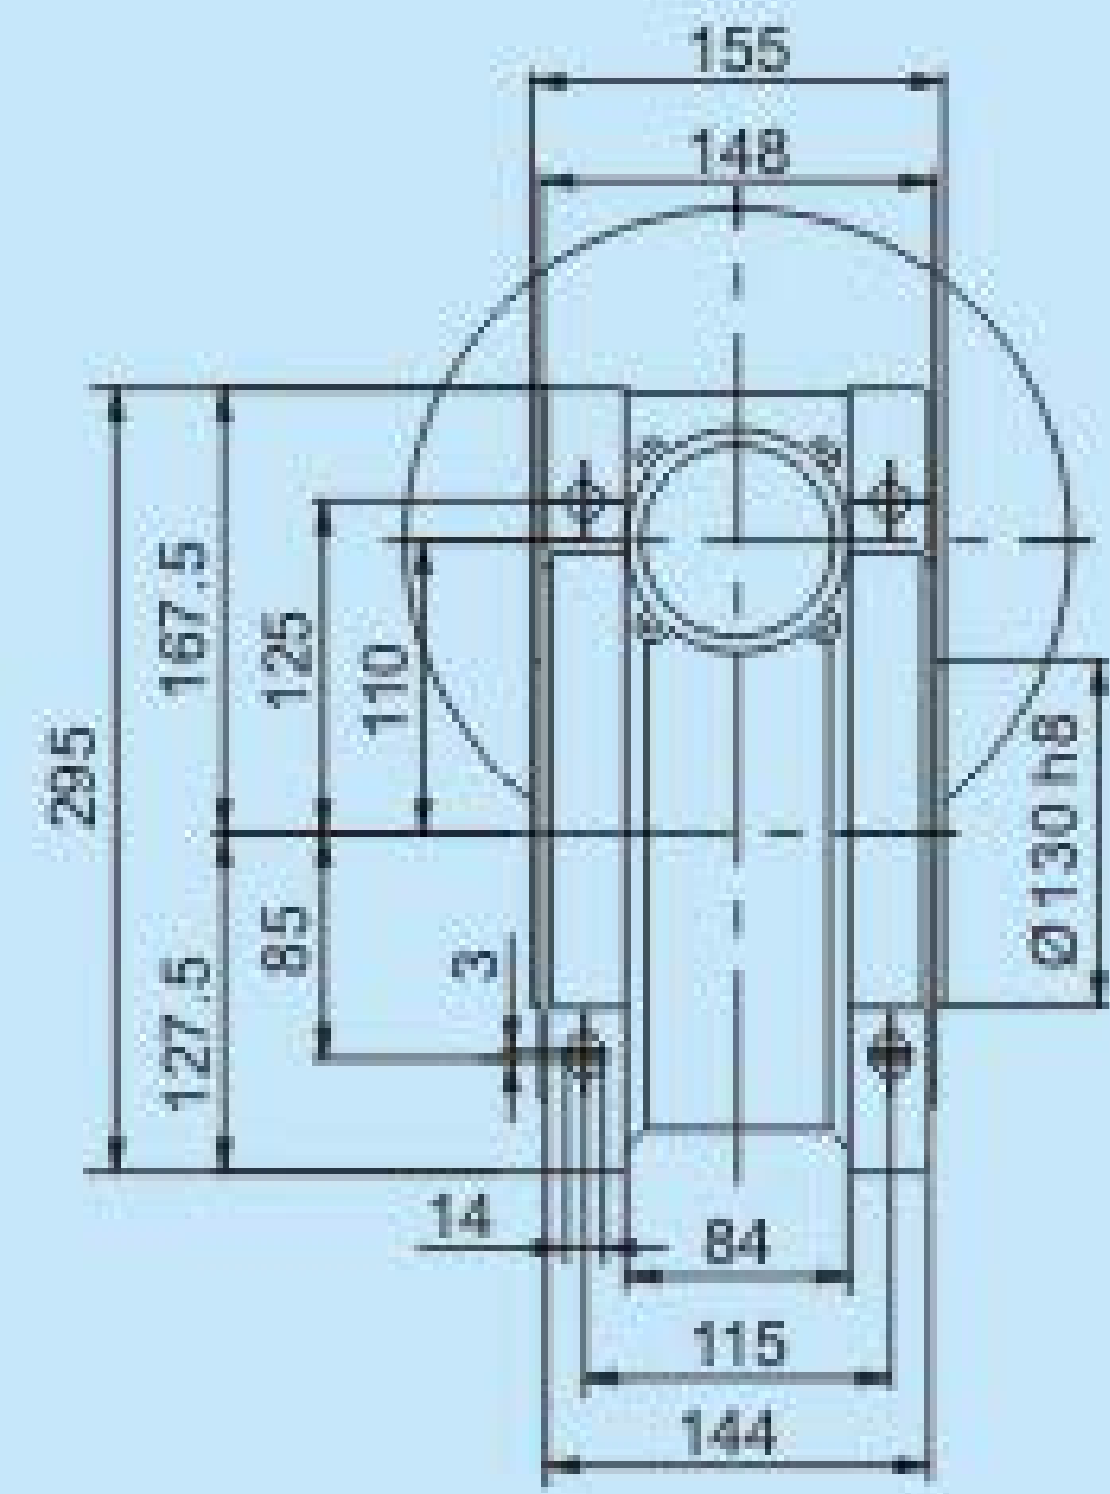

HMRV. VS

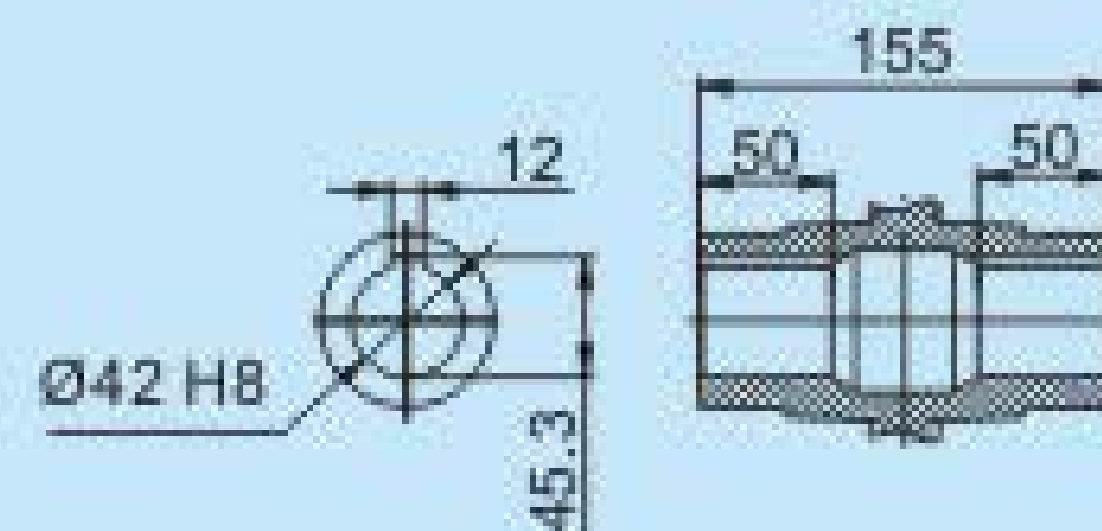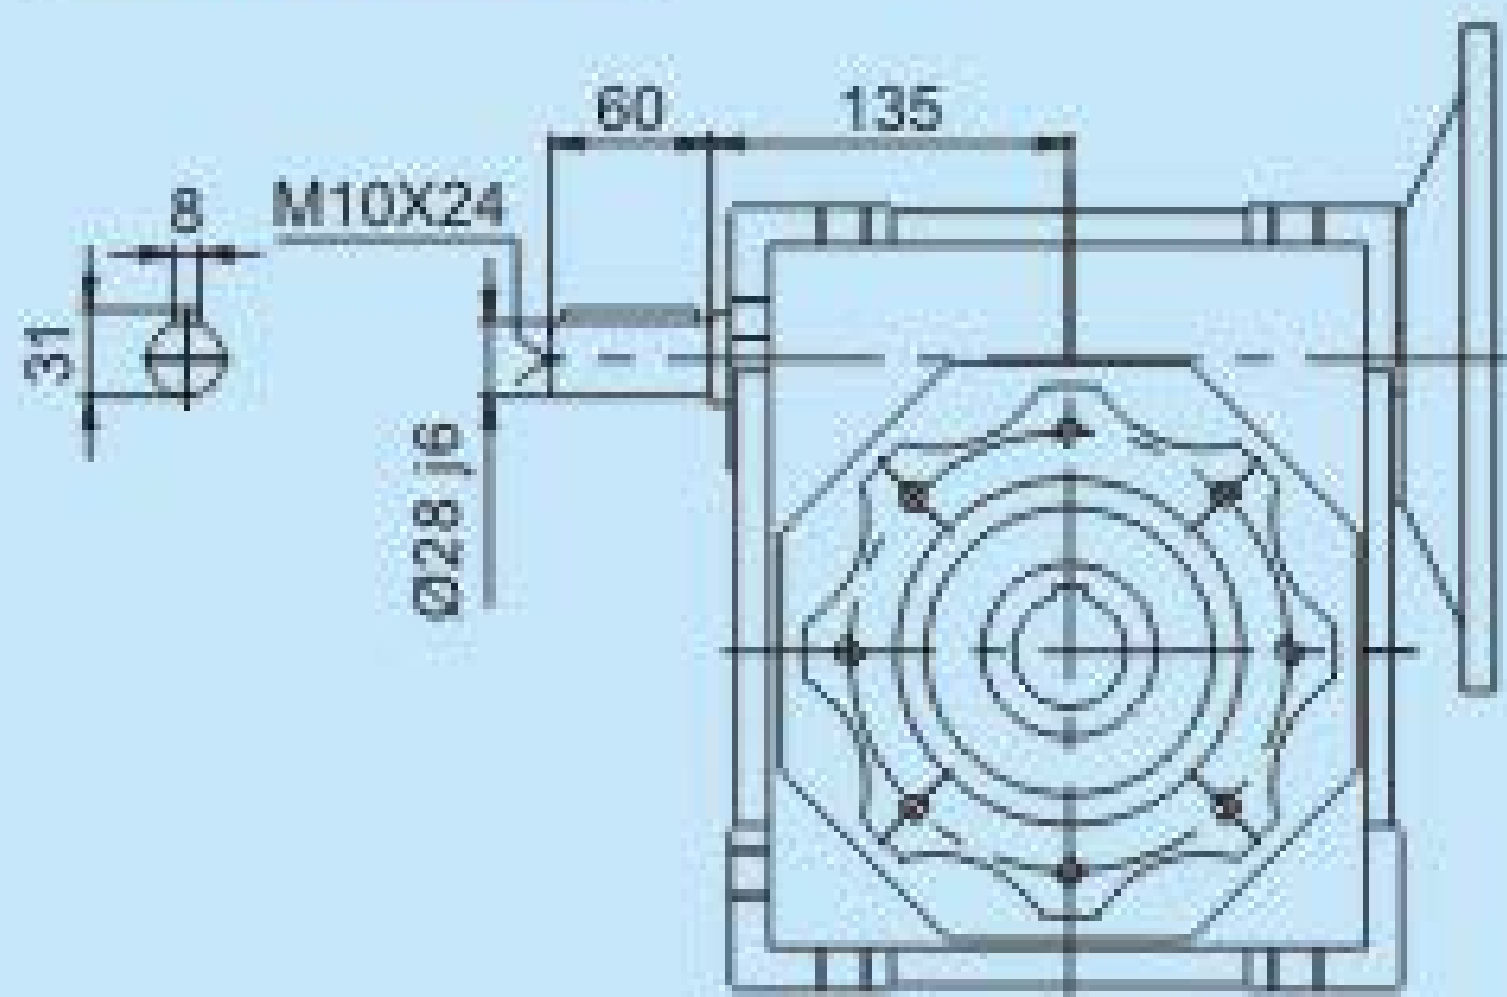

Output bore
输出孔




PAM-IEC 适用电机	N (H8)	M	P	bm	tm	S	Dm (H7)												
							5	7.5	10	15	20	25	30	40	50	60	80	100	Depth 深
132B5	Ø230	Ø265	Ø300	10	41.3	Ø15	-	38*	38*	38*	38*	-	-	-	-	-	-	-	80
100/112B5	Ø180	Ø215	Ø250	8	31.3	Ø15	-	28	28	28	28	28	28	28	28	28	-	-	60
90B5	Ø130	Ø165	Ø200	8	27.3	Ø11	-	-	-	-	-	24	24	24	24	24	24	24	50
80B5	Ø130	Ø165	Ø200	6	21.8	Ø11	-	-	-	-	-	-	-	-	-	-	19	19	40

Weight : 21kg


重量 : 21kg

Note:(*)Low profile key supplied by Haitec.

注释: 薄键由欧特士提供。



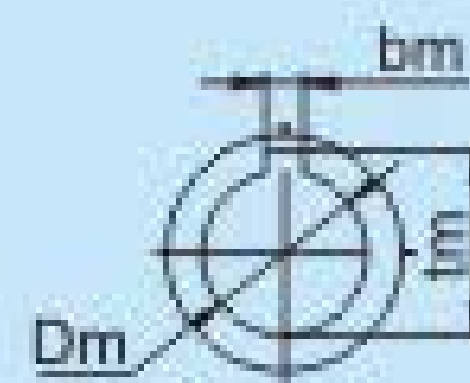


HMRV. VS



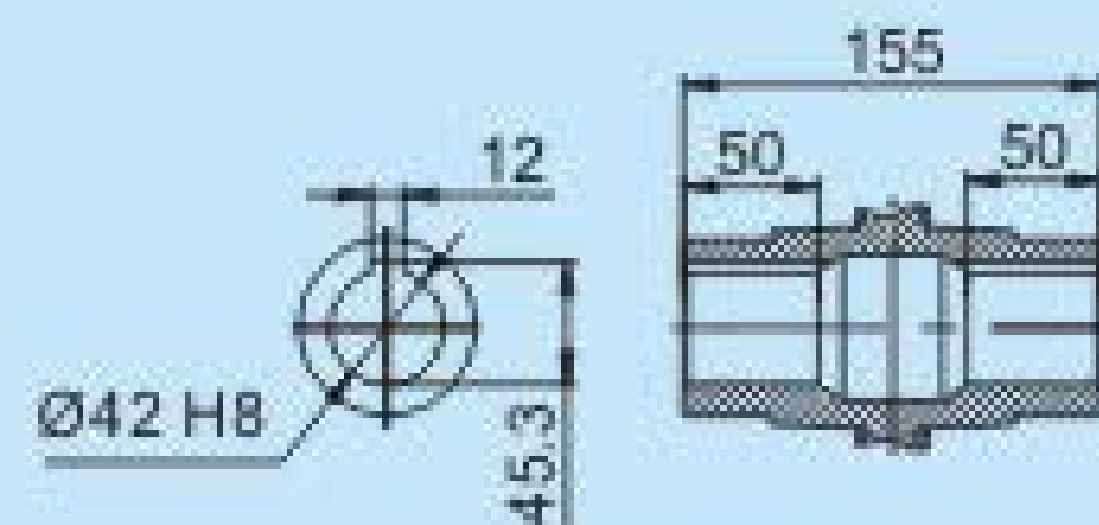


PAM-IEC 适用电机	N (H8)	M	P	bm	tm	S	Dm (H7)													
							5	7.5	10	15	20	25	30	40	50	60	80	100	Depth 深	
132B5	Ø230	Ø265	Ø300	10	41.3	Ø15	—	38*	38*	38*	38*	—	—	—	—	—	—	—	80	
100/112B5	Ø180	Ø215	Ø250	8	31.3	Ø15	—	28	28	28	28	28	28	28	28	28	—	—	60	
90B5	Ø130	Ø165	Ø200	8	27.3	Ø11	—	—	—	—	—	24	24	24	24	24	24	24	50	
80B5	Ø130	Ø165	Ø200	6	21.8	Ø11	—	—	—	—	—	—	—	—	—	—	—	19	19	40

注释：薄键由欧特士提供。

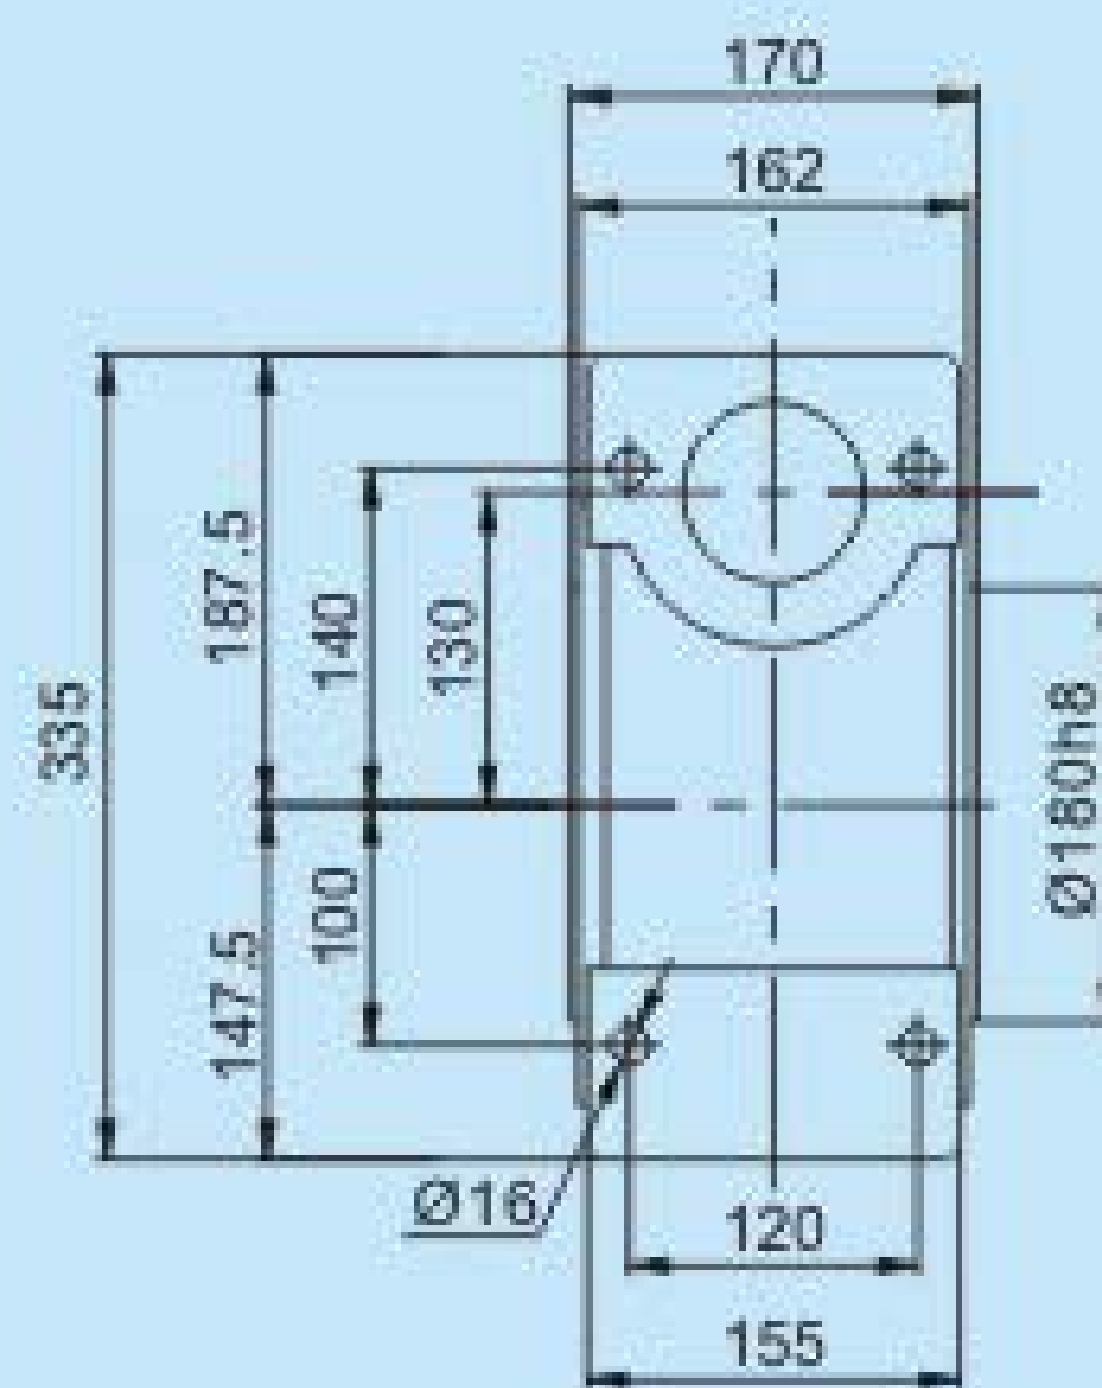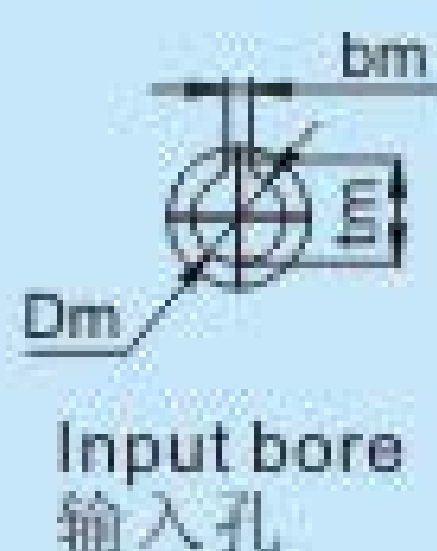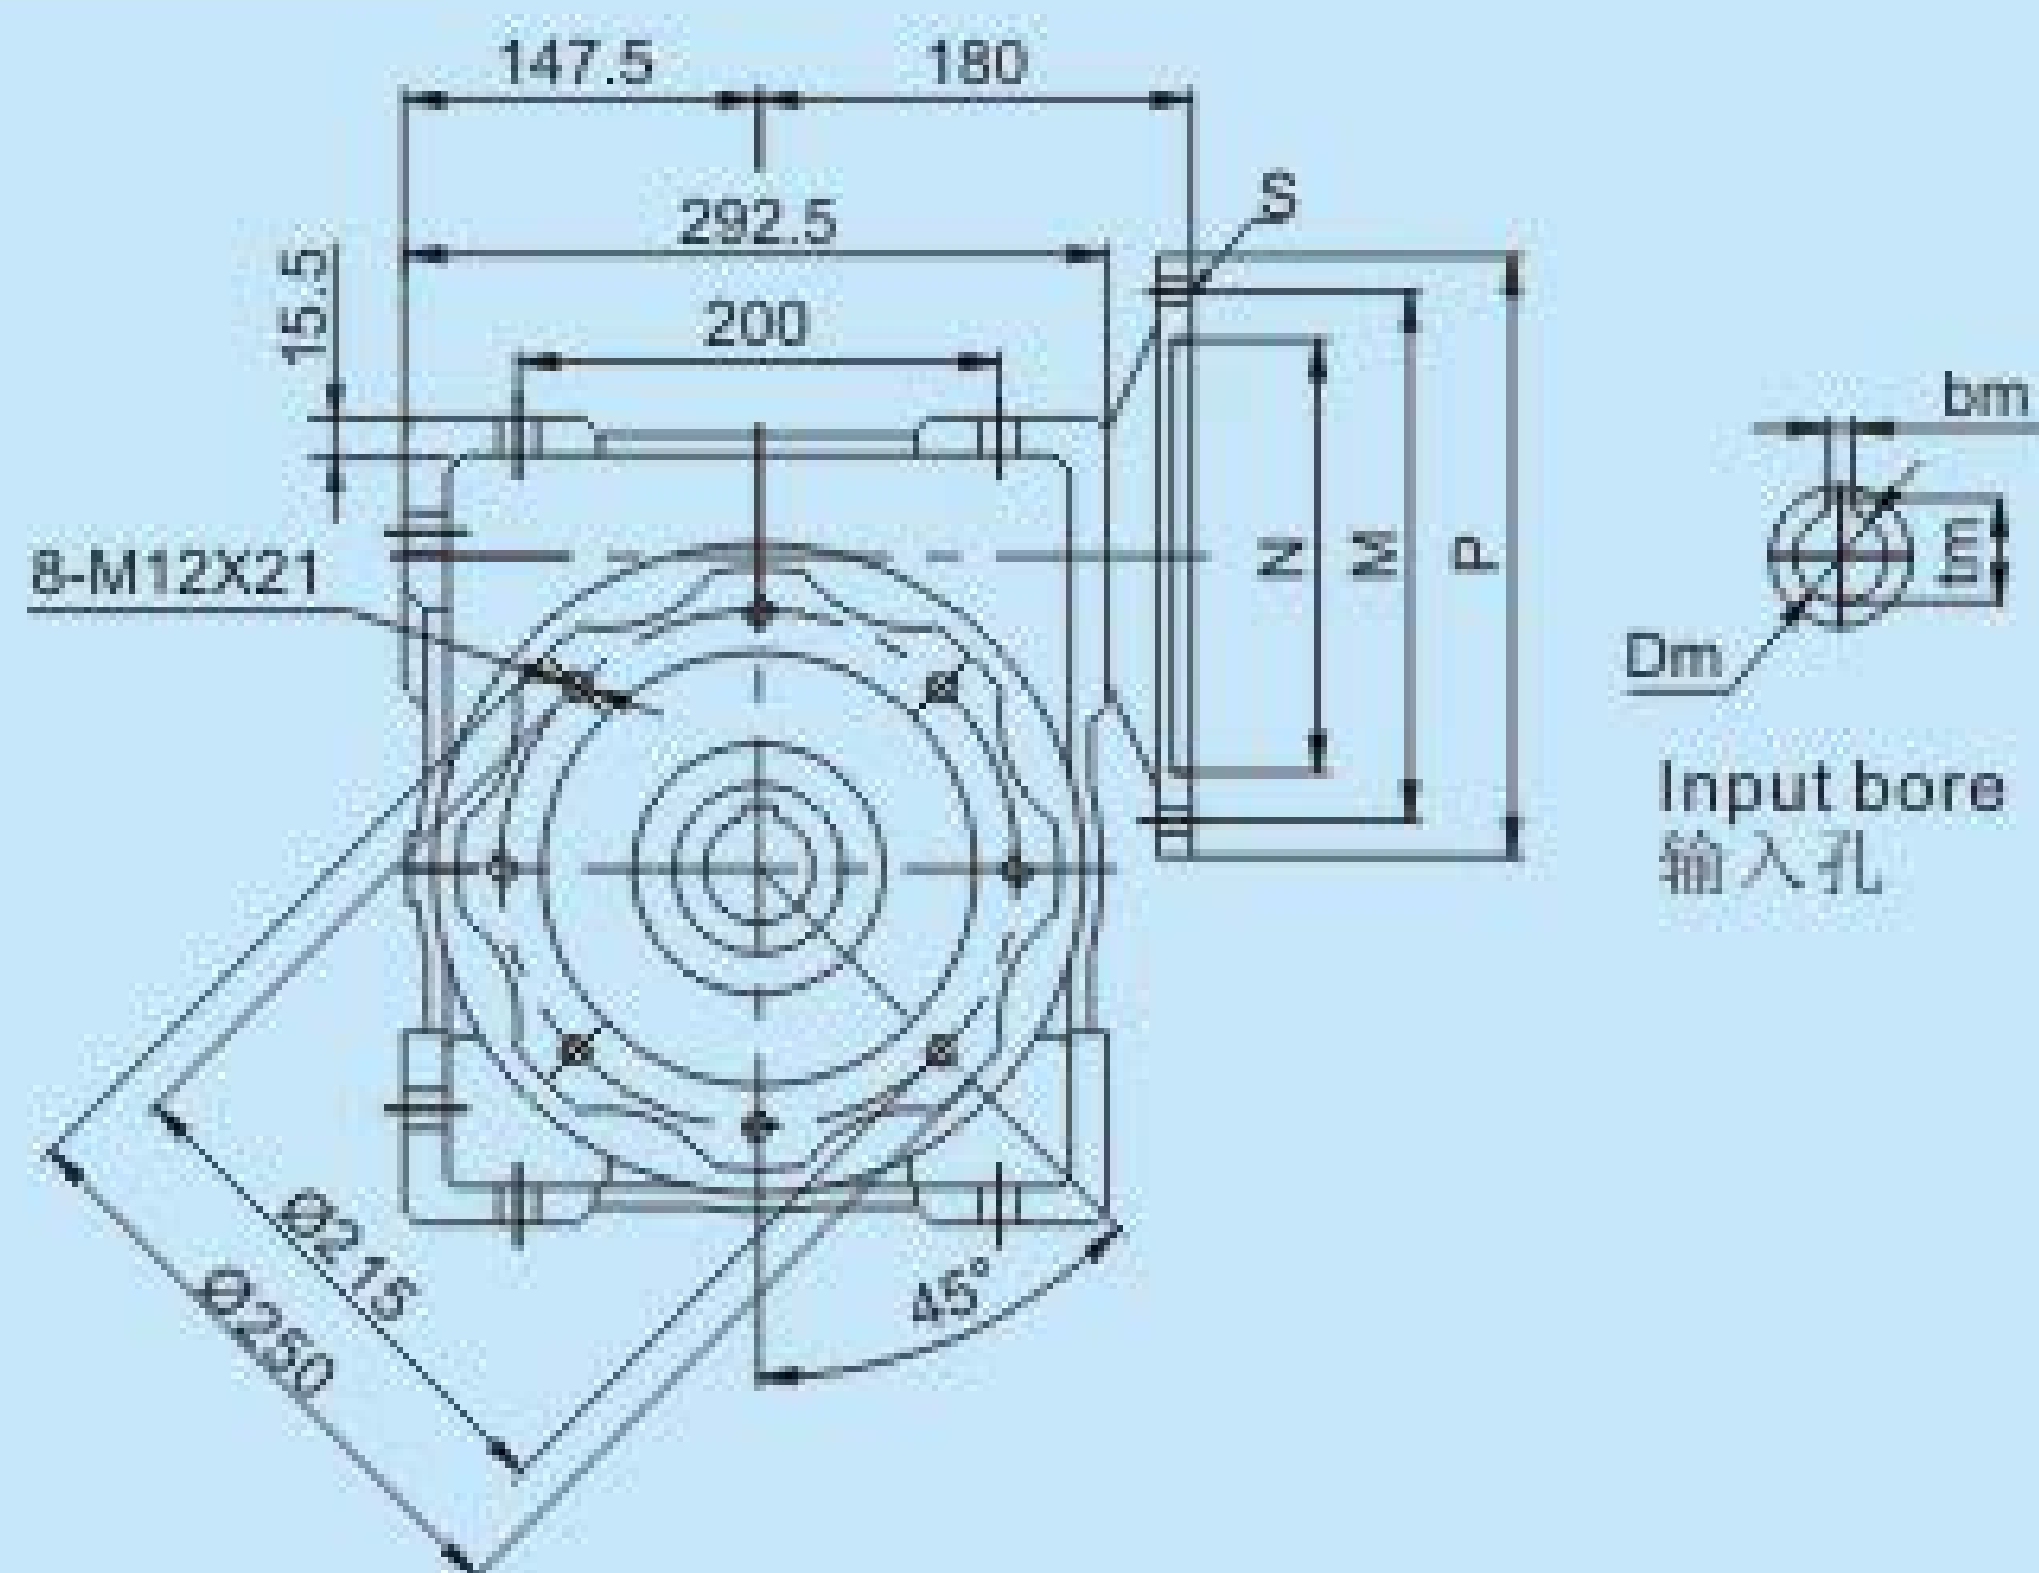

HMRV. VS

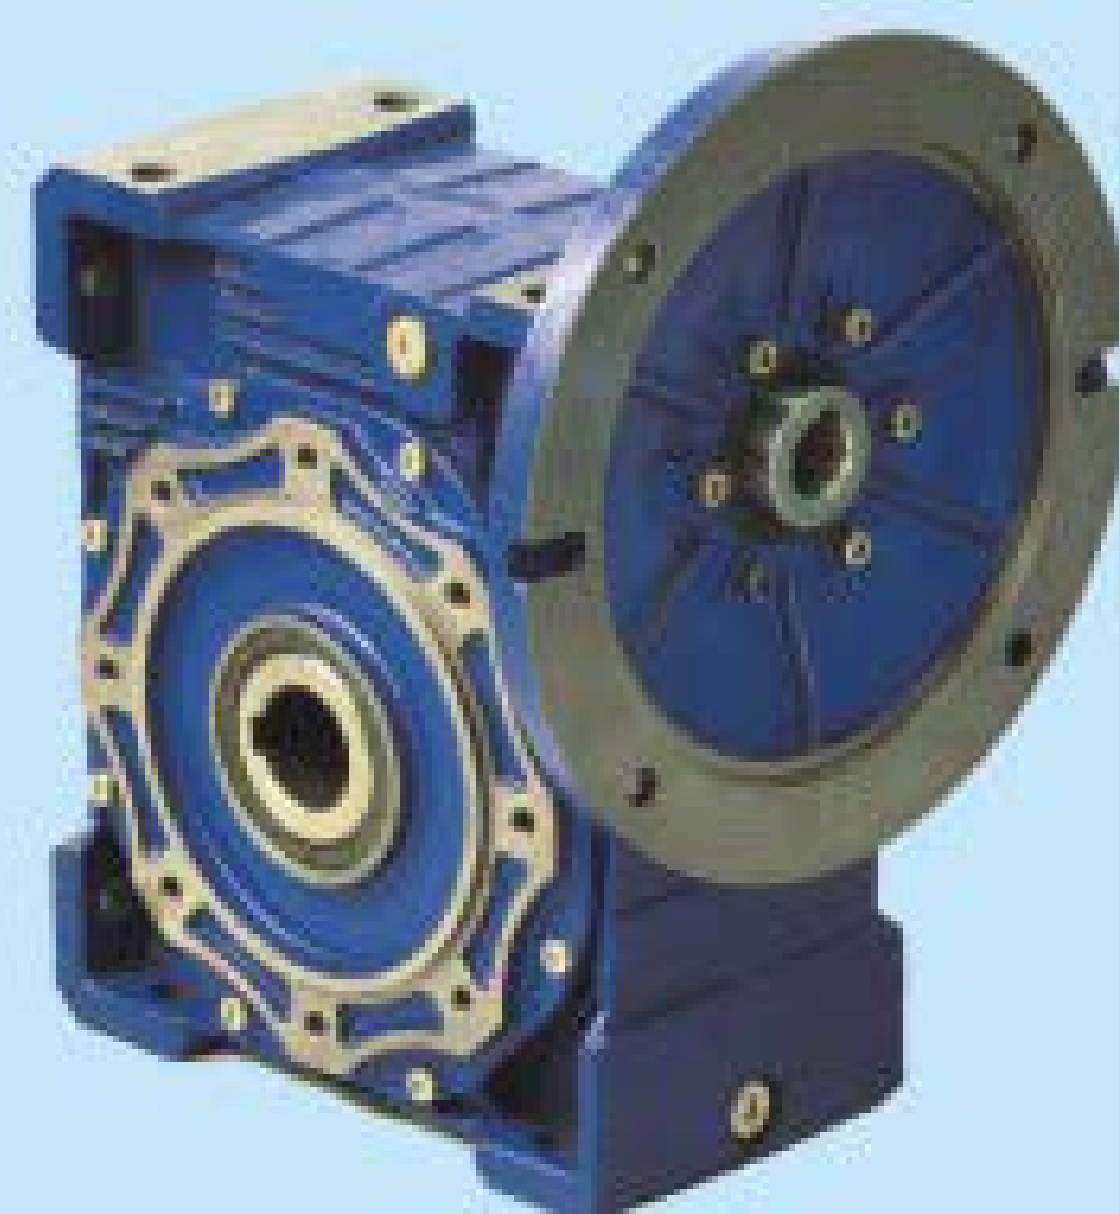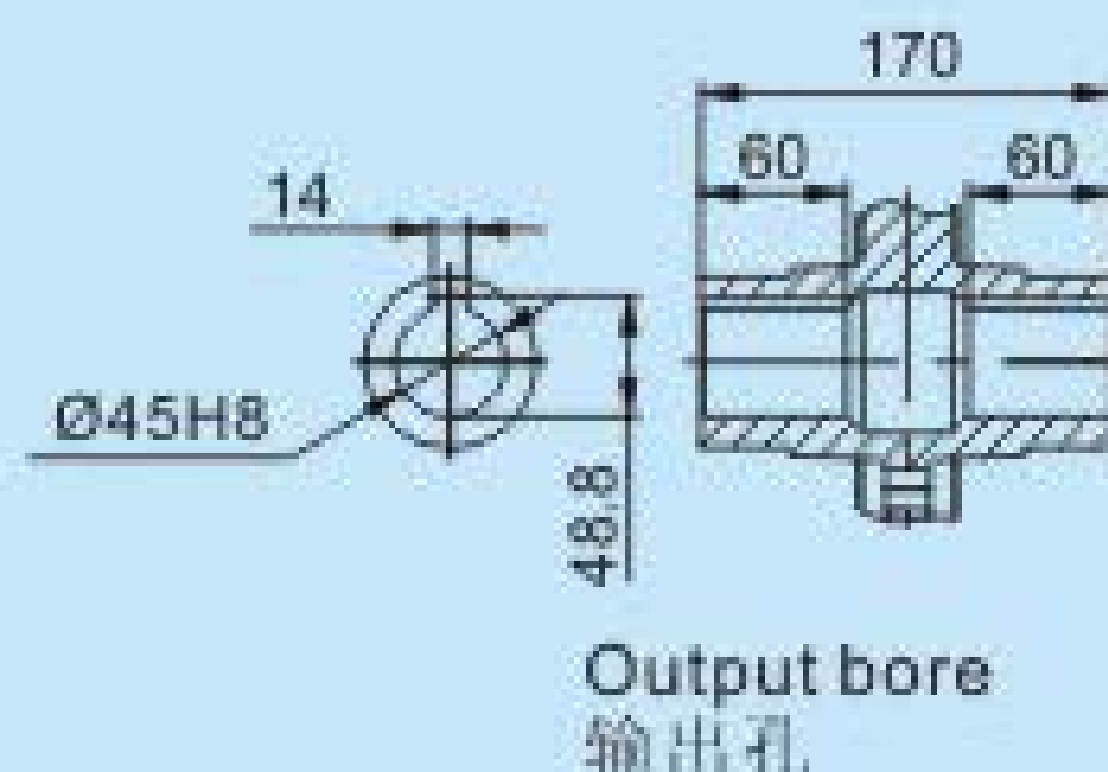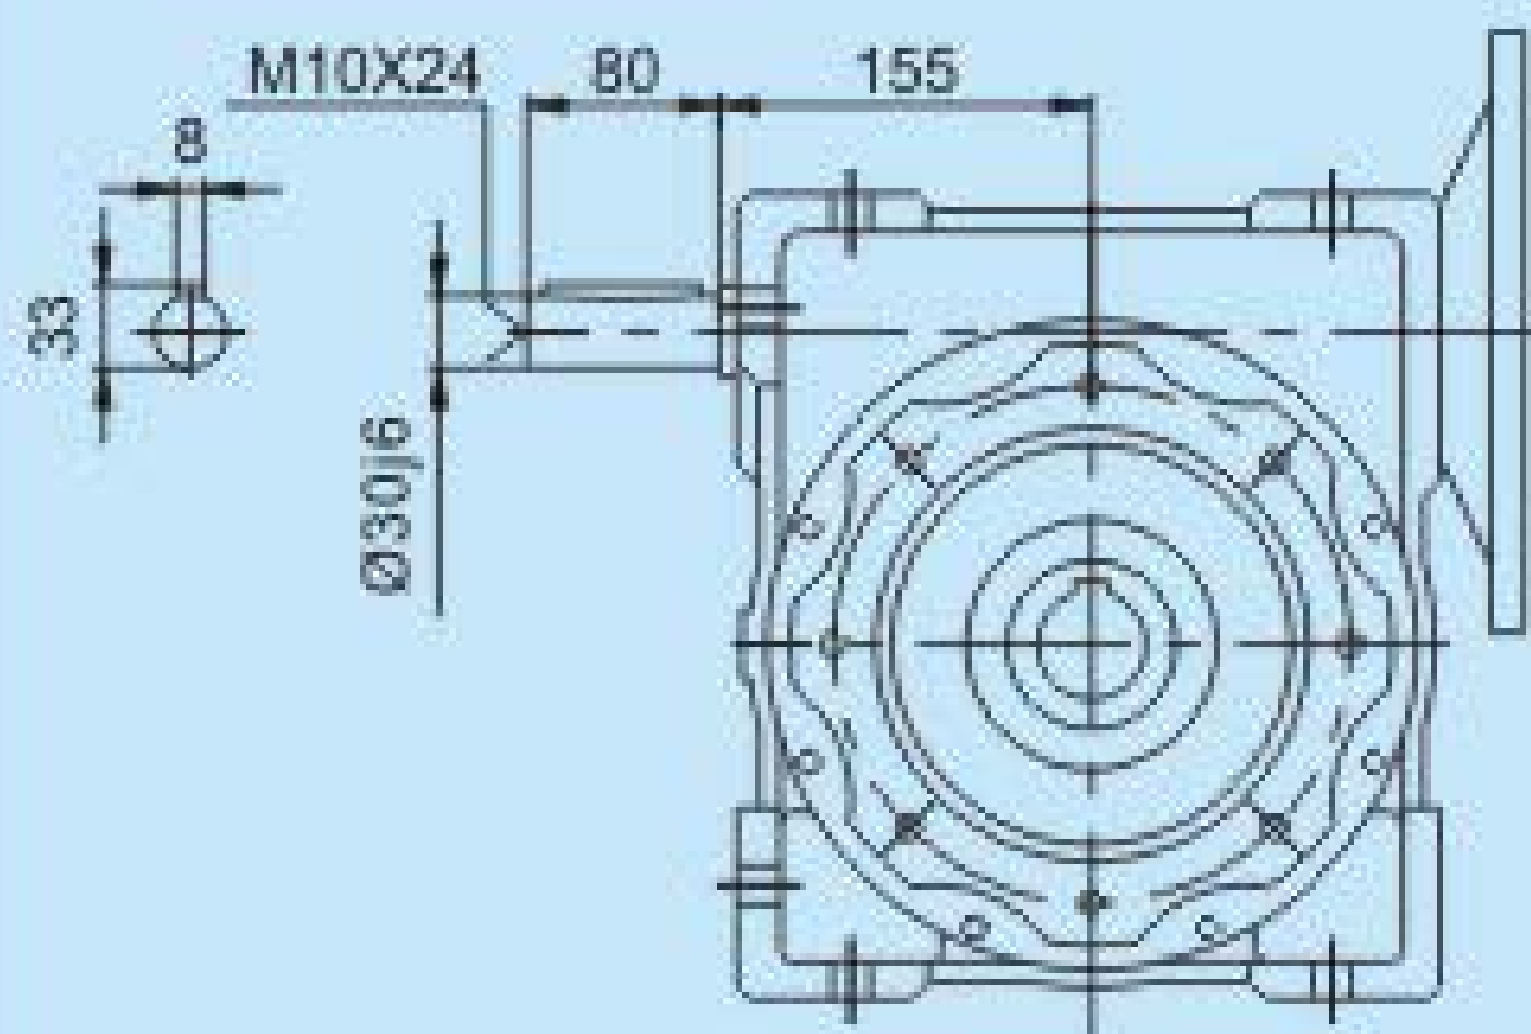



PAM-IEC 适用电机	N (H8)	M	P	bm	tm	S	Dm (H7)												
							5	7.5	10	15	20	25	30	40	50	60	80	100	Depth 深
132B5	Ø230	Ø265	Ø300	10	41.3	Ø15	-	38*	38*	38*	38*	38*	38*	38*	-	-	-	-	80
100/112B5	Ø180	Ø215	Ø250	8	31.3	Ø15	-	-	-	-	-	28	28	28	28	28	28	28	60
90B5	Ø130	Ø165	Ø200	8	27.3	Ø11	-	-	-	-	-	-	-	-	-	-	24	24	50

Weight : 50kg
重量 : 50kg



Note:(*)Low profile key supplied by Haitec.
注释: 薄键由欧特士提供。

HMRV

150

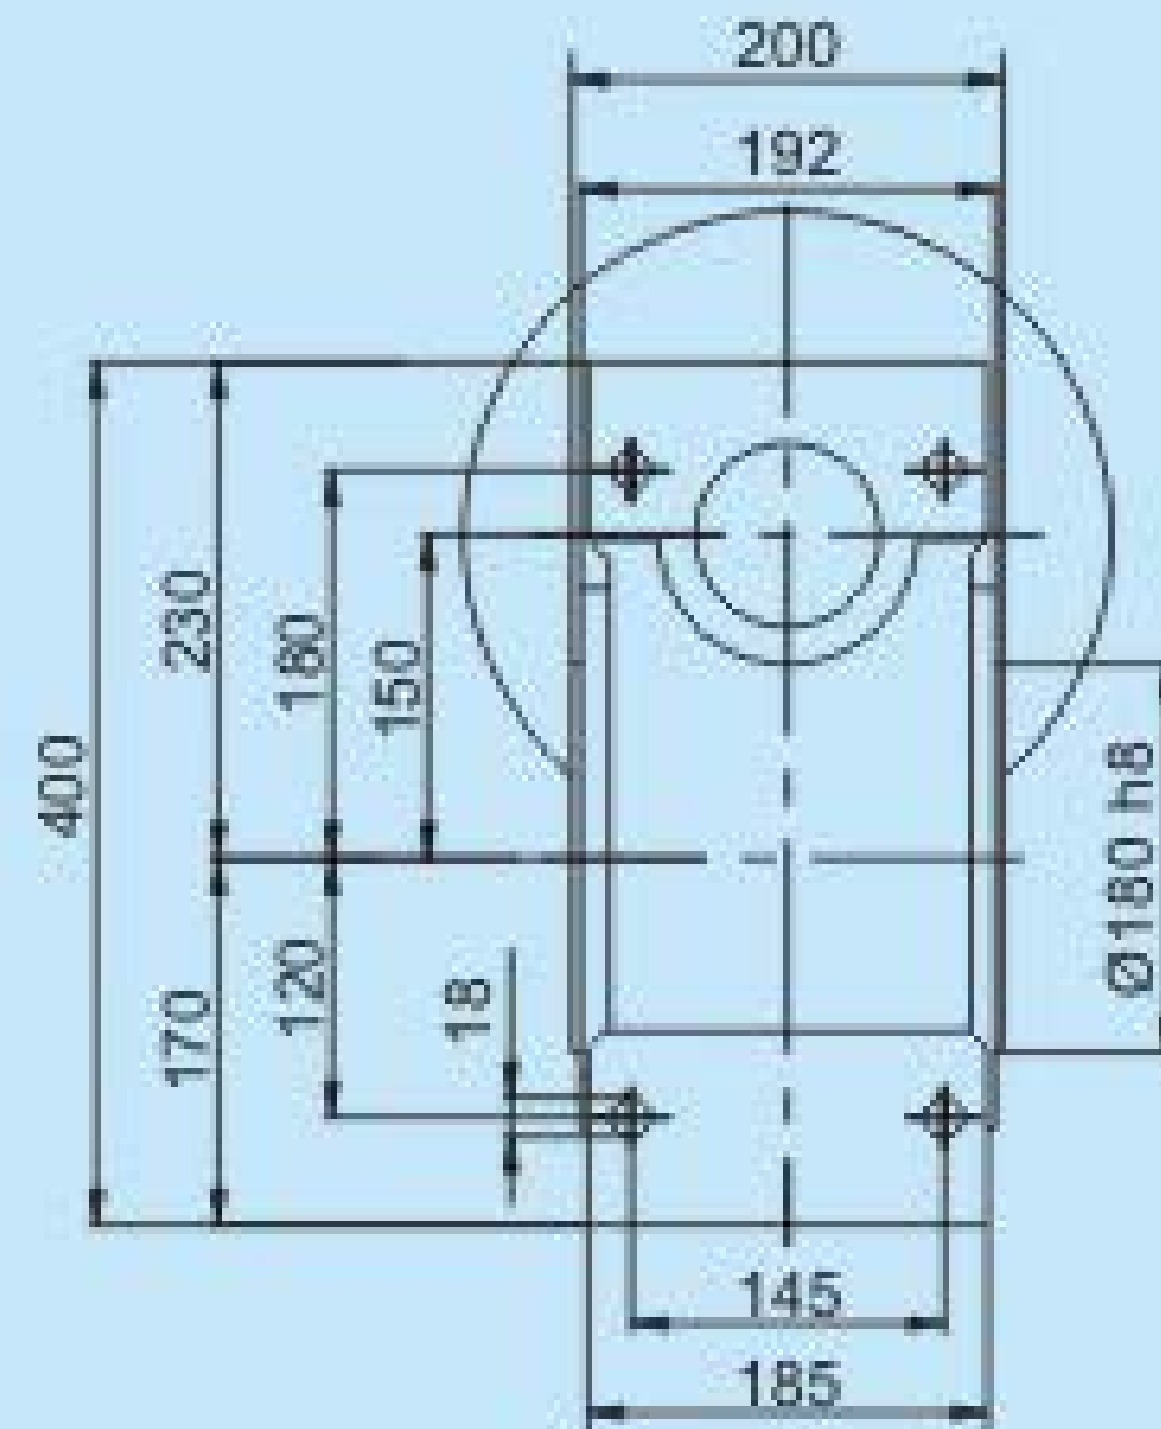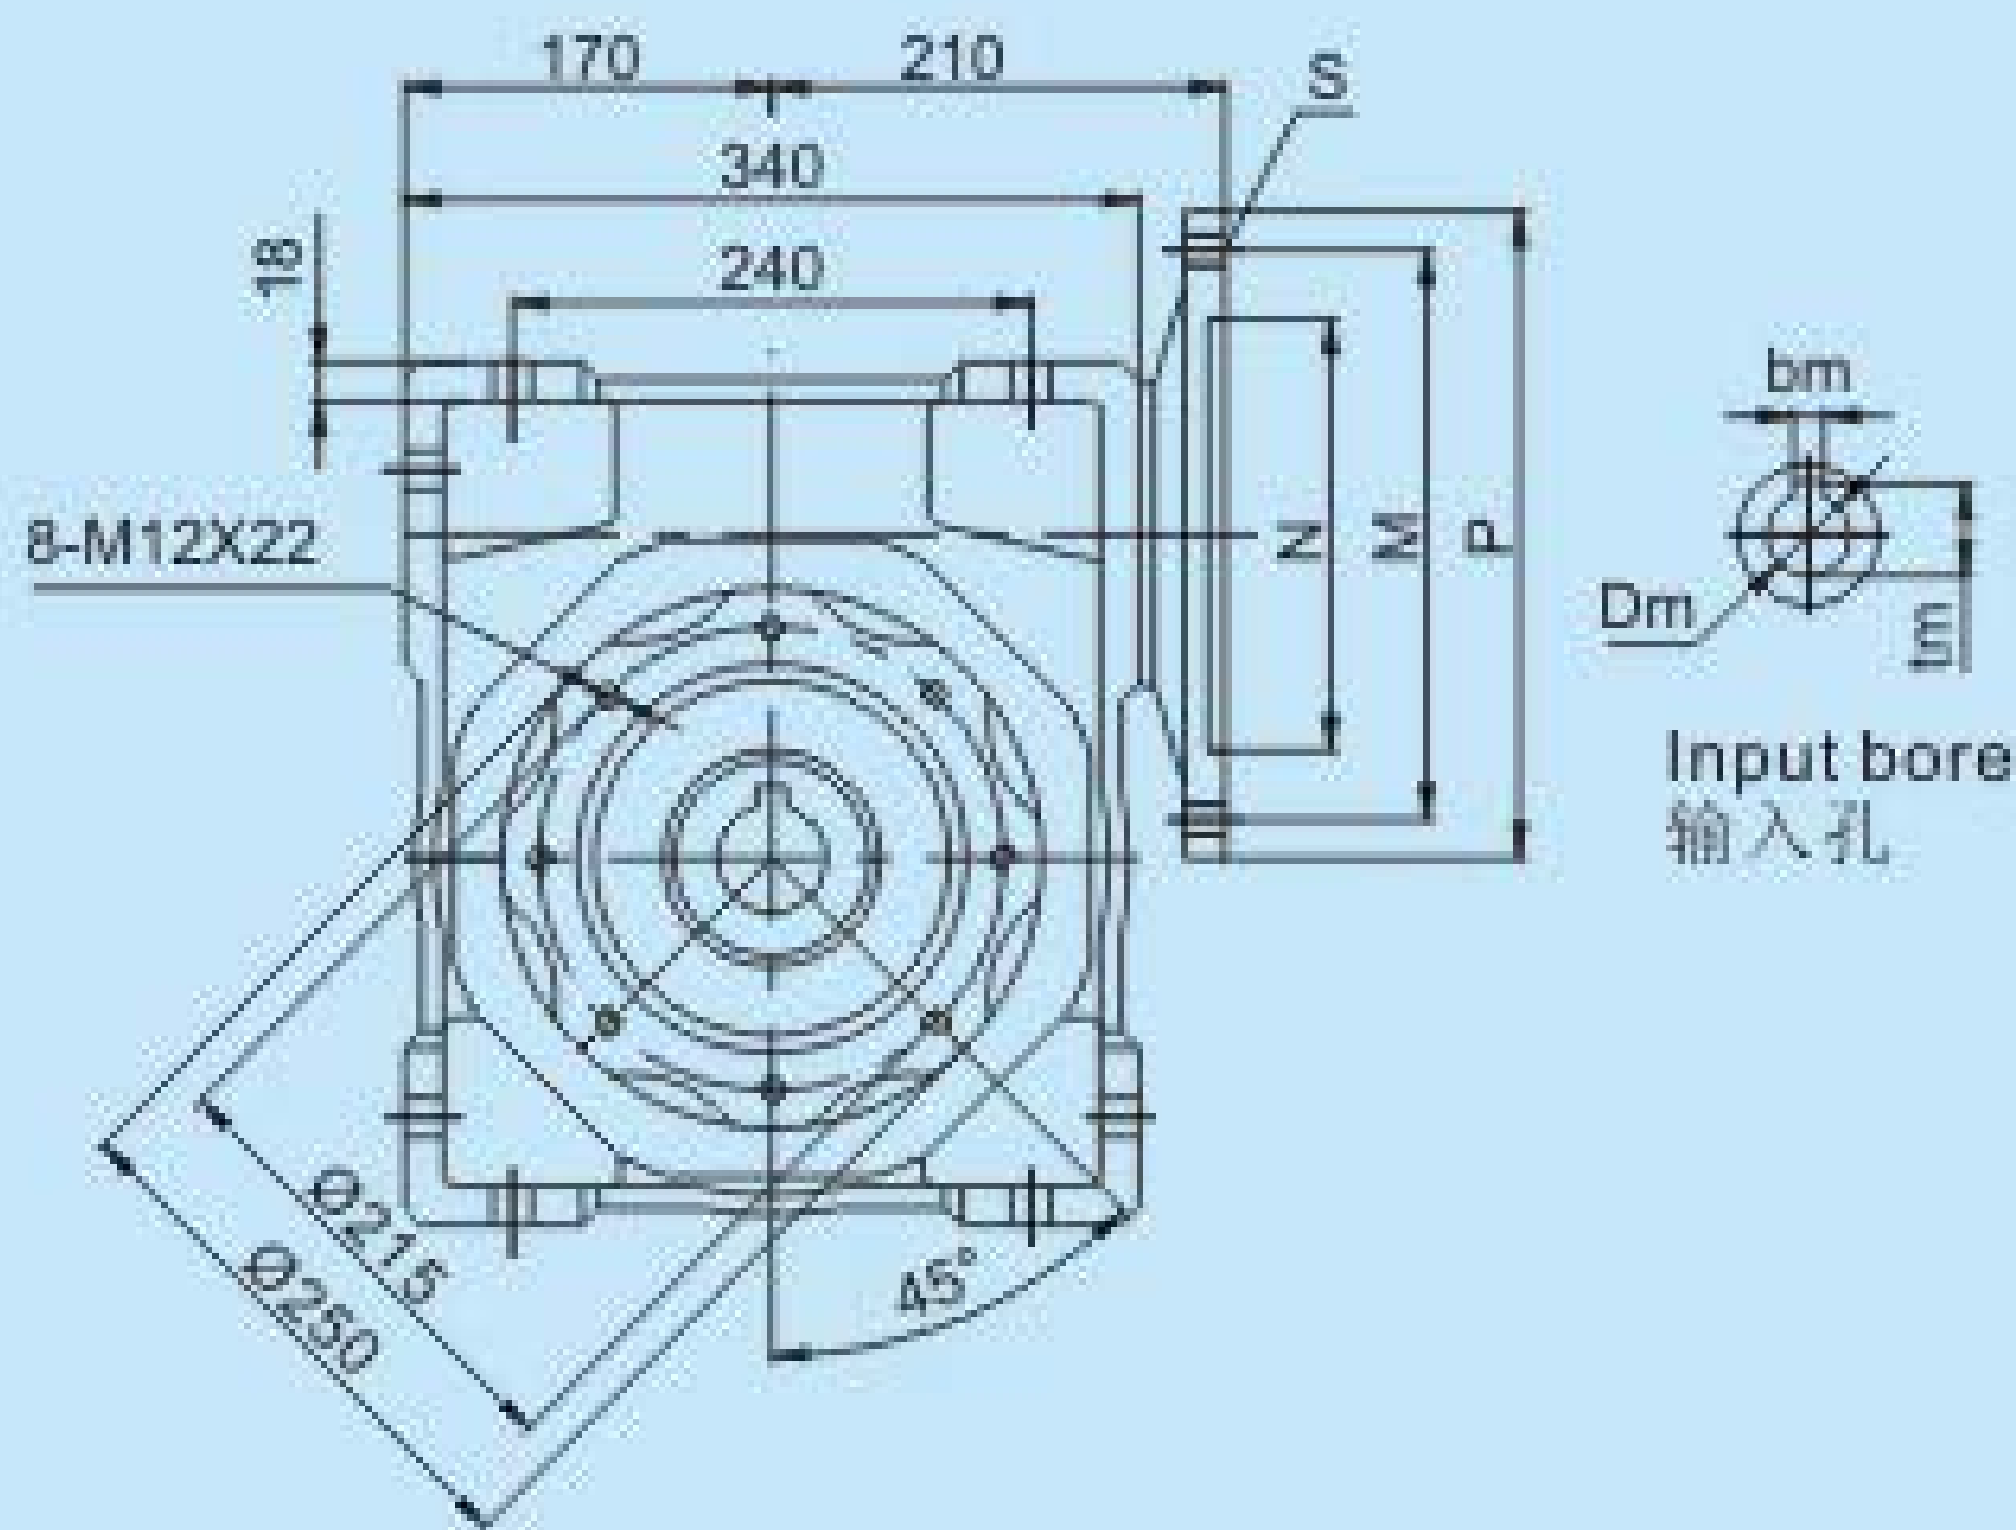

HMRV. VS

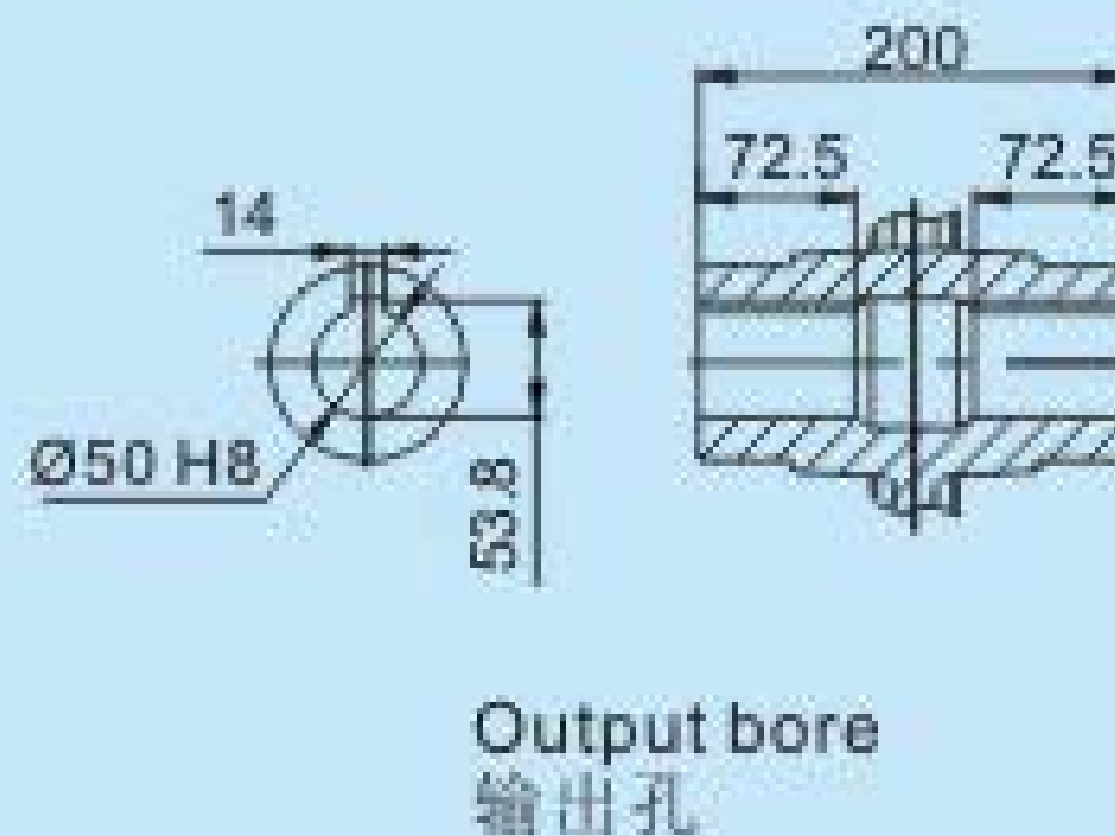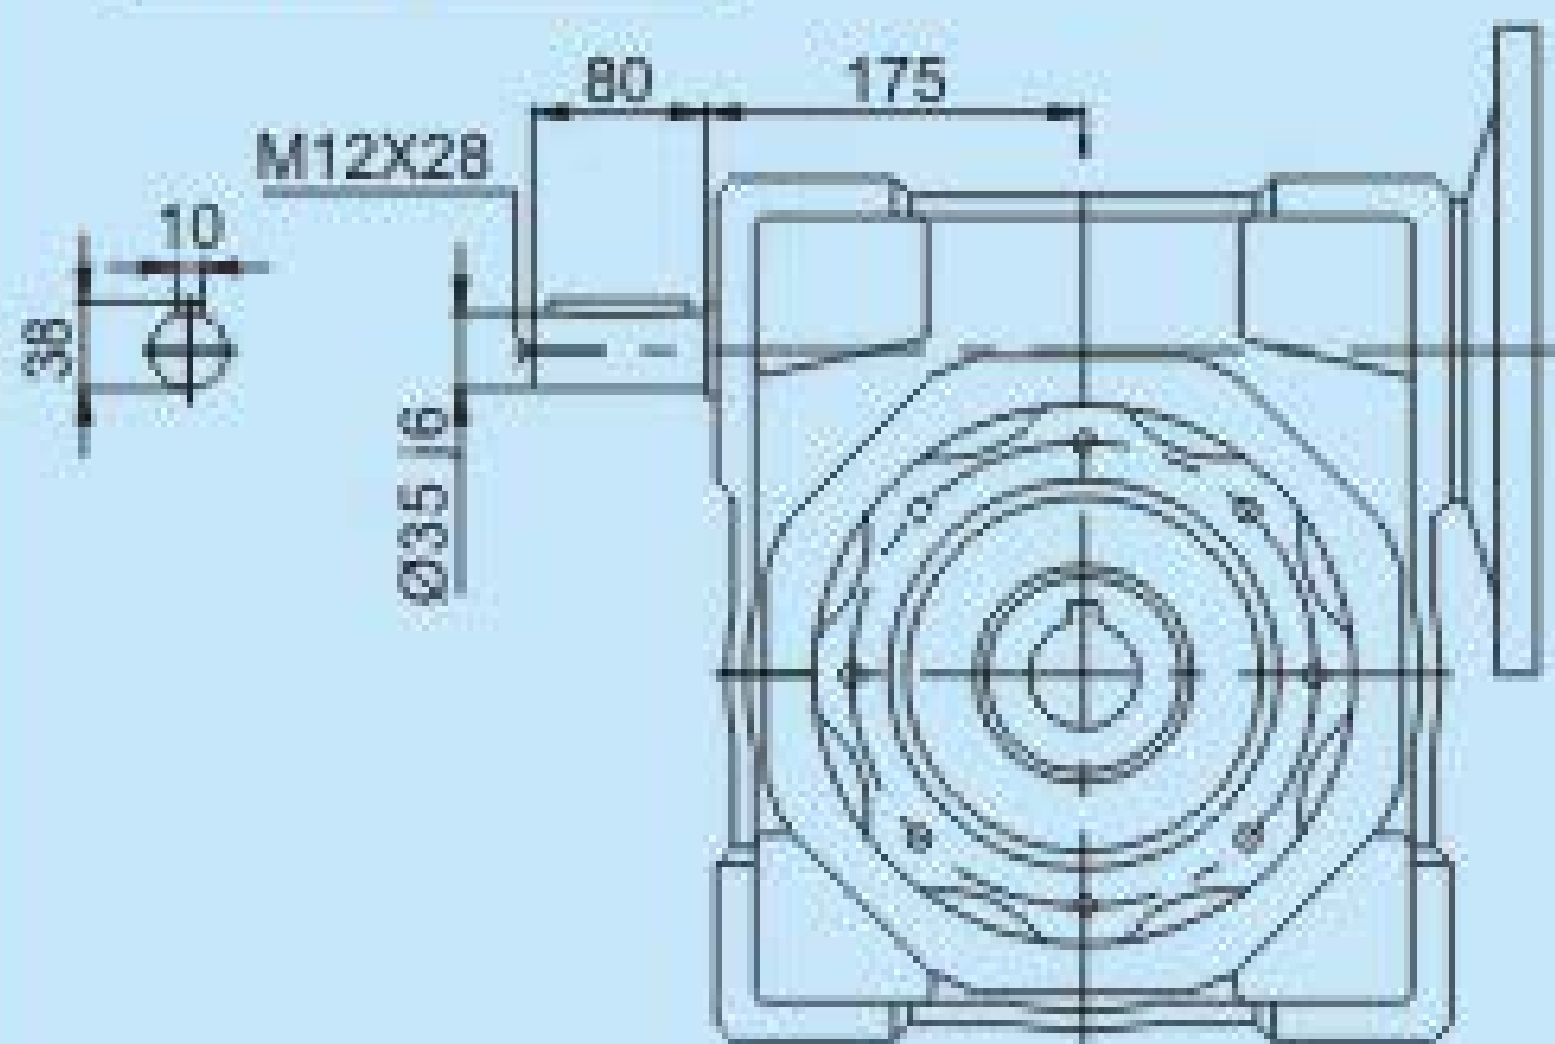

PAM-IEC 适用电机	N (H8)	M	P	bm	tm	S	Dm (H7)												
							5	7.5	10	15	20	25	30	40	50	60	80	100	Depth 深
160B5	Ø250	Ø300	Ø350	12	45.3	Ø15	—	42	42	42	42	42	—	—	—	—	—	—	110
132B5	Ø230	Ø265	Ø300	10	41.3	Ø15	—	—	—	—	38	38	38	38	38	38	—	—	80
100/112B5	Ø180	Ø215	Ø250	8	31.3	Ø15	—	—	—	—	—	—	—	—	28	28	28	28	60

Weight : 84kg

重量 : 84kg